

TECHNICAL.  
FUNCTIONAL.  
EFFICIENT.



## STAY WELL-INFORMED

Scan QR code, select country and get our latest prices.  
Visit us at [slv.com](https://www.slv.com)

TECHNICAL.  
FUNCTIONAL.  
EFFICIENT.

 **SLV**tec

# TECHNICAL. FUNCTIONAL. EFFICIENT.

## EDITORIAL

---

CAME TO STAY [06](#)

## INDOOR

---

PANEL [08](#)  
SURFACE [12](#)  
TRACKSPOT [16](#)  
DOWNLIGHT [22](#)  
UNIVERSAL  
DOWNLIGHT [26](#)

## INDUSTRY

---

WATERPROOF [34](#)  
INDUSTRY BATTEN [38](#)  
HIGHBAY [42](#)

## OUTDOOR

---

OUTDOOR BULKHEAD [46](#)

FLOODI [50](#)

## LAMP

---

LED TUBES [54](#)

## LED STRIPS & MORE

---

GRAZIA [58](#)

FLEX STRIPS  
ACCESSORIES [64](#)

OPERATING DEVICES  
& CONTROLLERS [70](#)

# HERE TO STAY

As a reliable partner for electricians and the specialised trade, we are constantly working to meet the needs of you – our customers – even better. As a full-range supplier, we will now be able to offer you the right technical lights and accessories for your day-to-day business. To this end, we have continued on our path of innovation and developed a completely new brand for technical and functional solutions: SLVtec.

SLVtec



*„SLVtec is our answer to the challenges of today's installer: high efficiency, reliable quality and easy installation – without compromise.“*

Mark Henrik Körner,  
CEO SLV Lighting Group



Fast and reliable delivery 24 h (Germany), 48 h (Europe)



Great value for money




5-year guarantee\*



We offer 98 % stock availability



German engineering

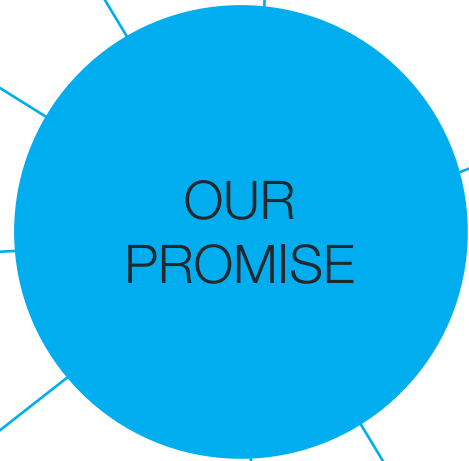

## OUR PROMISE

### EFFICIENT AND MULTIFUNCTIONAL


Discover our new technical product range: SLVtec. With state-of-the-art LED technology, we offer energy-efficient and functional lighting solutions for indoor and outdoor use. From wet room lights to high-bay spotlights – our products impress with quality and multi-functionality. Thanks to Multi-Color, Multi-Lumen and MultiZoom of our new lights, you are flexible in your planning and well equipped for your next project.

Decide in favour of SLVtec and order now from your specialist dealer or contact our sales team with confidence.

### OUR PROMISE

Within the SLVtec product line, you also get high-quality products and continue to benefit from high availability and excellent service. The optimal value for money and 5-year guarantee\* underline our functional product portfolio.

\*Please note the guarantee conditions available at [slv.com](http://slv.com) › Service › Downloads › Guarantee conditions

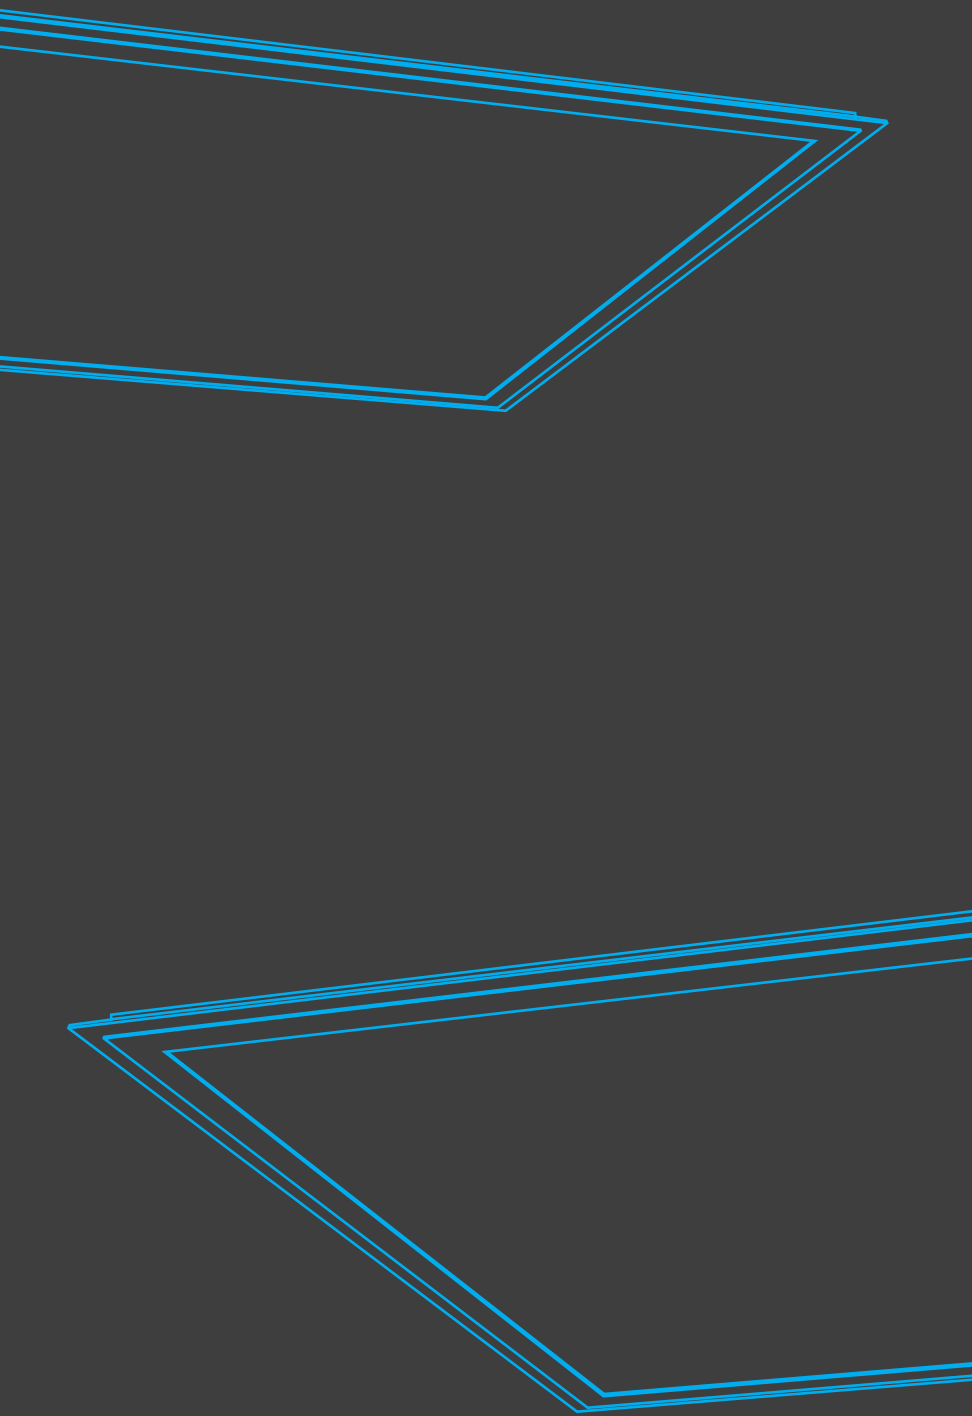

## COMBINE



PANEL



Surface-mounted  
or recessed  
mounting frame



When purchasing a PANEL  
the mounting frame is  
not included as standard.



# PANEL

## PRODUCT ADVANTAGES




High energy saving thanks to efficiency of up to 126 lm/W

Can be used as office lighting thanks to UGR<19

Simple change of light colour by means of DIP switch

Solid design and homogeneous light

The external driver enables flexibility and easy installation

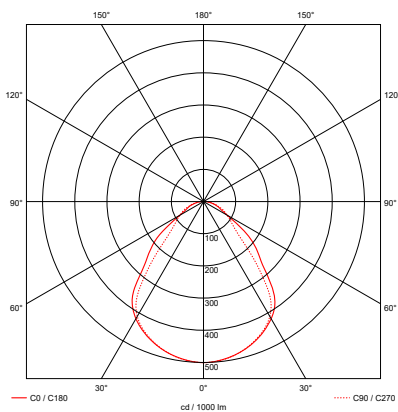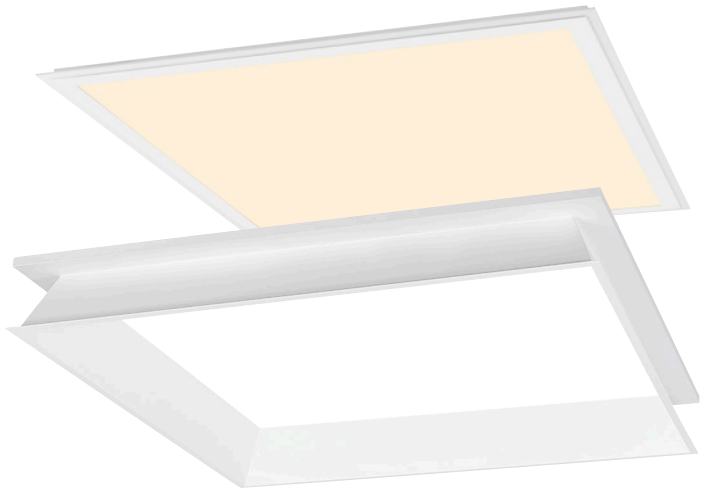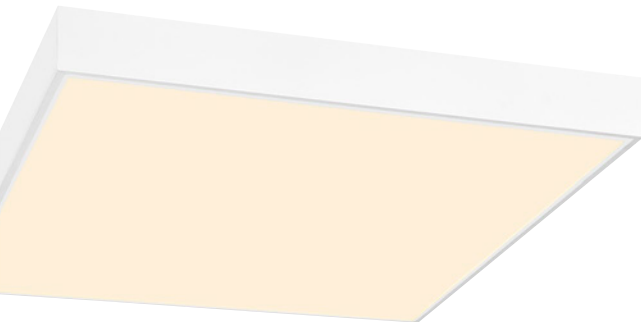

The graphic refers to article 1007498 in 3000 K.

## PRODUCT CHARACTERISTICS

Available as classic UGR<22, glare-free UGR<19 and DALI variant

Surface-mounted and recessed installation with separately available mounting frames

Protection rating IP40

Colour rendering CRI>80

Multi-Color: 3000 K / 4000 K

## AREAS OF APPLICATION


Office, corridors, conference rooms

# PANEL

## INDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
PANEL V 600 34 W, 830 / 840	○	34 W	220-240 V	□	4100 lm	121 lm/W	3000 K
					4300 lm	126 lm/W	4000 K
PANEL V 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K
PANEL V DALI 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K
PANEL V 625 34 W, 830 / 840	○	34 W	220-240 V	□	4100 lm	121 lm/W	3000 K
					4300 lm	126 lm/W	4000 K
PANEL V 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K
PANEL V DALI 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K

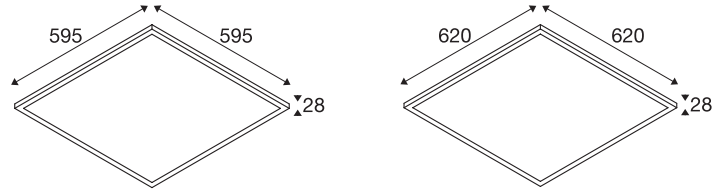

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	115°	-	-	-	 L80B10	<22	-	40	-	1007496	65,00
>80	85°	-	-	-	 L80B10	<19	-	40	-	1007498	75,00
>80	85°	-	-	-	 L80B10	<19		40	-	1007504	110,00
>80	115°	-	-	-	 L80B10	<22	-	40	-	1007497	65,00
>80	85°	-	-	-	 L80B10	<19	-	40	-	1007499	75,00
>80	85°	-	-	-	 L80B10	<19		40	-	1007505	110,00



L x W x H (mm):  
600 x 600 x 63



600 x 600 x 71



625 x 625 x 63




625 x 625 x 71



Ø x L (mm):  
1,5 x 1500

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
PANEL 600 surface-mounted mounting frame		-	-	-	1007474	45,00
PANEL 600 recessed mounting frame		-	-	-	1007575	65,00
PANEL 625 surface-mounted mounting frame		-	-	-	1007475	45,00
PANEL 625 recessed mounting frame		-	-	-	1007576	65,00
PANEL V safety rope 1500 mm		-	-	-	1007577	15,00

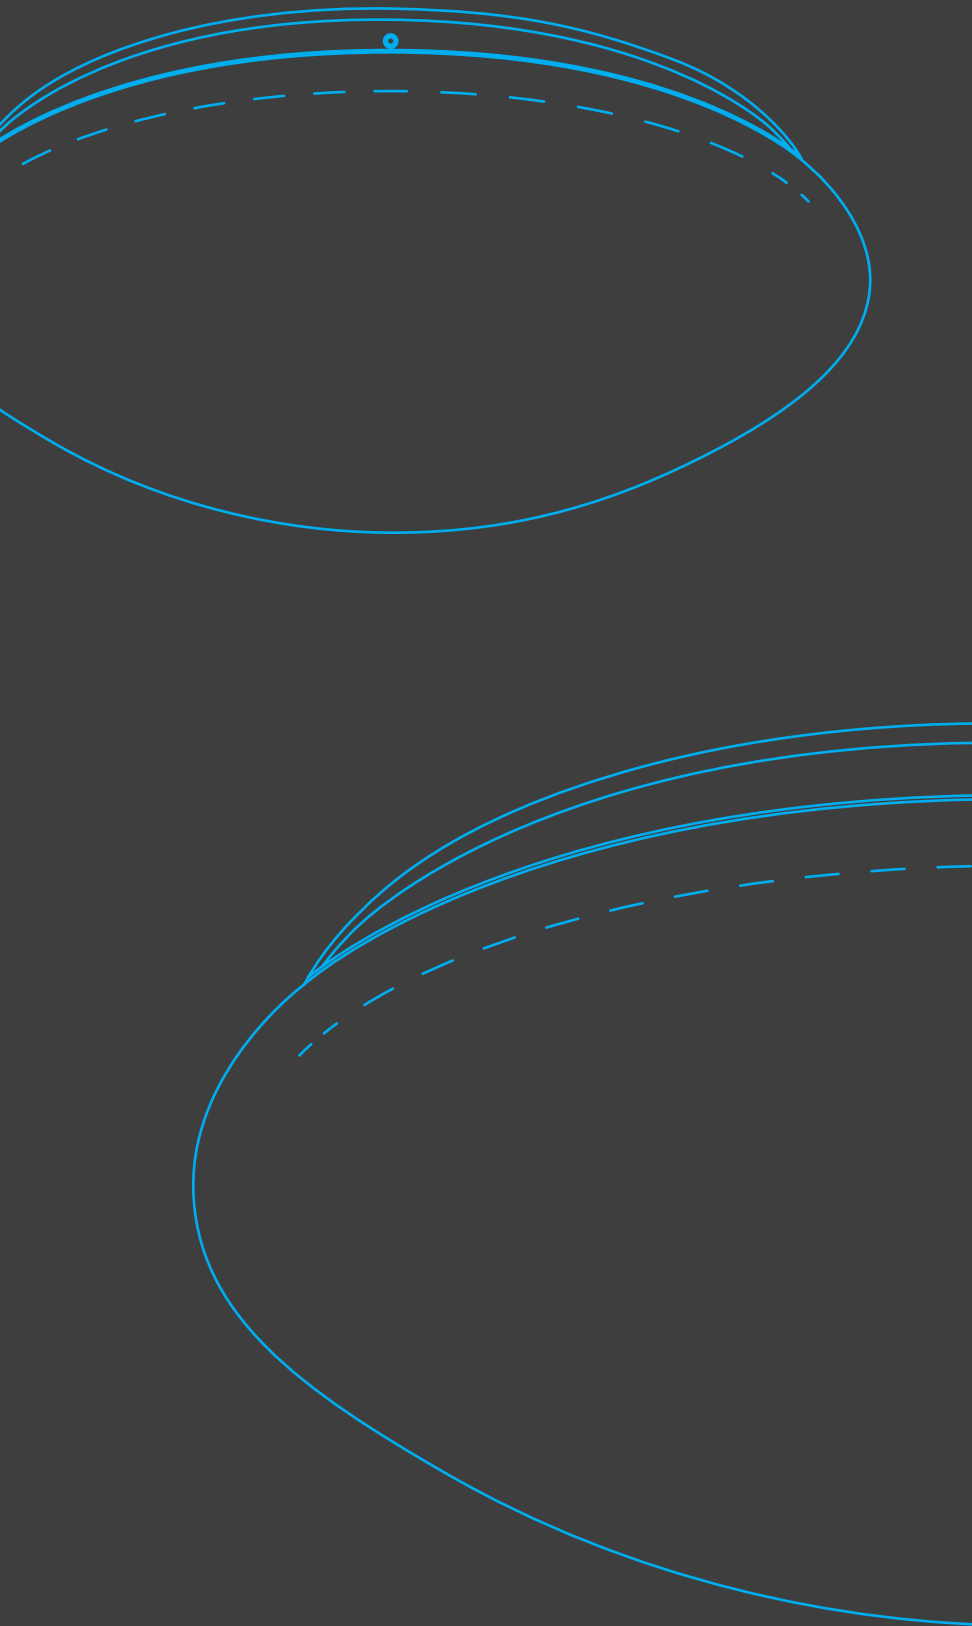

3000 K

or

4000 K




# SURFACE

## PRODUCT ADVANTAGES

Splash-proof light with IP44 for use in the bathroom, stairwell or cellar

Easy change of colour temperature and total wattage via DIP switch

Convenient installation thanks to removable cover

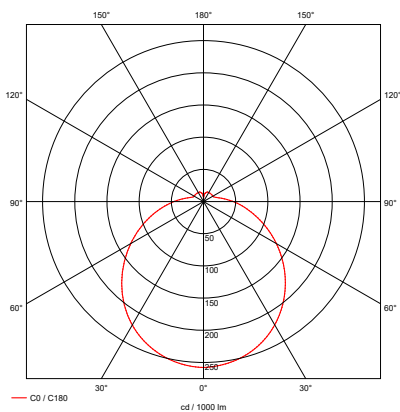

The graphic refers to the article 1007516 in 20 W and 3000 K.

## PRODUCT CHARACTERISTICS

Multi-Color: 3000 K / 4000 K

Switchable total wattage 10 W / 15 W / 20 W

Additional version with microwave sensor available

CRI>80

## AREAS OF APPLICATION


Stairwells, corridors, bathrooms







# SURFACE


INDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
SURFACE V 390 <i>10 / 15 / 20 W, 830 / 840, IP44</i>	○	20 W	220-240	⊕	1850 lm	93 lm/W	3000 K
					2000 lm	100 lm/W	4000 K
SURFACE V 390 <i>10 / 15 / 20 W, 830 / 840, IP44, Sensor</i>	○	20 W	220-240	⊕	1850 lm	93 lm/W	3000 K
					2000 lm	100 lm/W	4000 K



	CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
	>80	120°	-	-	-	 L80B10	-	-	44	-	1007516	50,00
	>80	120°	-	-	-	 L80B10	-	-	44	-	1007517	65,00

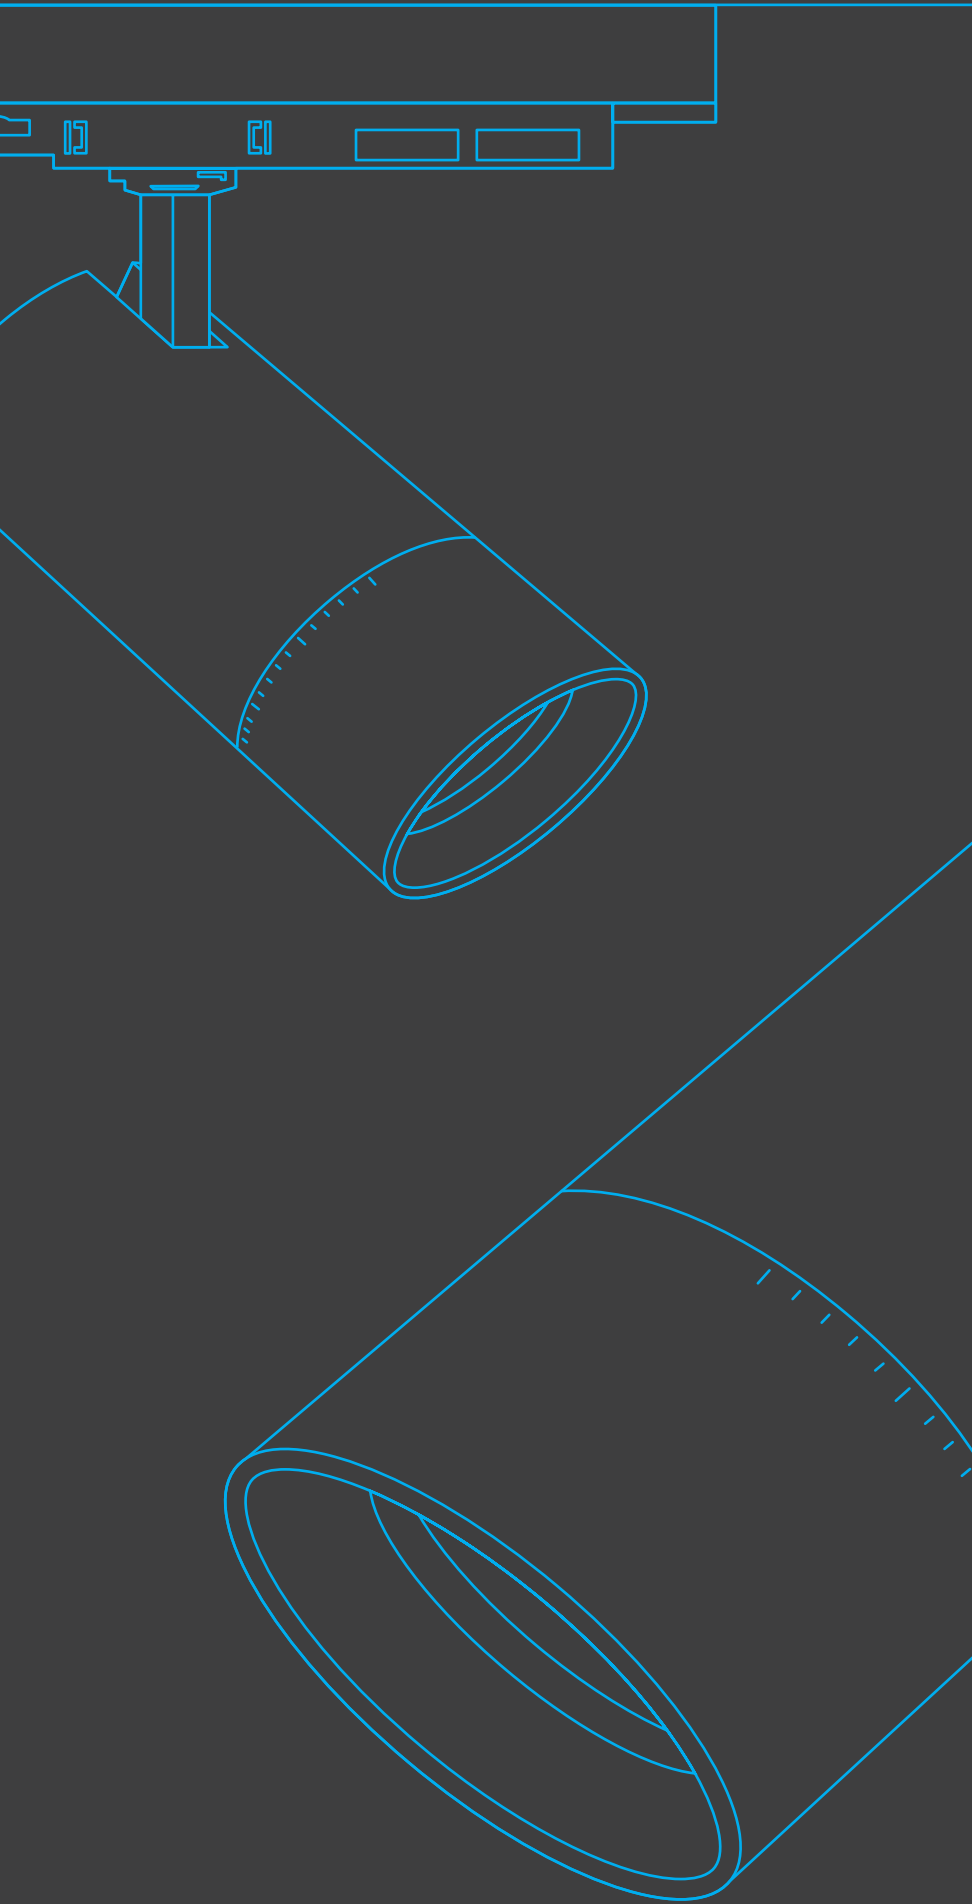

Zoom lens  
continuously adjustable  
from 24° to 60°  
by mechanical rotation





# TRACKSPOT

## PRODUCT ADVANTAGES

Zoom lens continuously adjustable from 24° to 60° by mechanical rotation


Easy change of light colour and total wattage via DIP switch

High-quality 3-phase track spotlight with excellent light quality thanks to CRI>90

Simple and timeless design



90° vertically and 330° horizontally  
rotatable

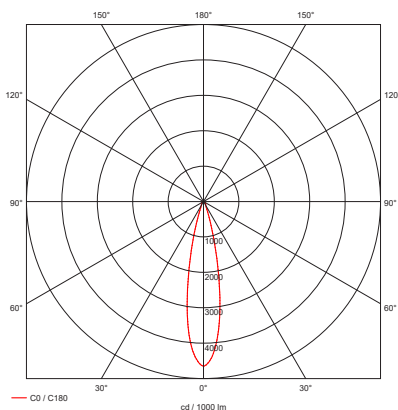

The graphic refers to article 1007656  
in 30 W, 3000 K and 24° beam angle.

## PRODUCT CHARACTERISTICS

Available in two sizes, in black and white

Switchable total wattage: 10 W / 15 W / 20 W (size S);  
25 W / 30 W / 35 W (size M)

Multi-Color: 2700 K / 3000 K / 4000 K

CRI>90

## AREAS OF APPLICATION

Fashion shops, supermarkets, hotels

# SIMPLE ALL-ROUNDER

---

The new SLVtec product line is introduced with a highlight: the SLV trackspot. This high-quality 3-phase track spotlight with mechanical zoom lens offers electricians and lighting designers a high-output tool for designing rooms as well as for accent lighting of objects. With the multifunctional settings of the SLV trackspot, you create the right light in different areas of application. The trackspot is available in timeless design and simple colours black and white.



## EASILY ADAPTABLE TO ANY LOCATION

- 1 Multi-Zoom: 24° to 60°
- 2 Multi-Color: 2700 K / 3000 K / 4000 K
- 3 Multi-power: 10 W / 15 W / 20 W (size S); 25 W / 30 W / 35 W (size M)
- 4 2 sizes in 2 colours each for 3-phase track system



### **MULTI-POWER**

The switchable total wattage allows you to create different lumen packages. A switch on the light allows you to adjust the light intensity as needed to achieve the desired lighting level.

### **3-PHASE TRACK SYSTEM**

Compatibility with a 3-phase track system ensures easy installation and flexible positioning of the lights.

### **MULTI-COLOUR**

With the Multi-Colour function, you can adjust the light colour to create the desired mood. Using DIP switches, you can easily choose between 2700 K, 3000 K and 4000 K to create the right atmosphere.

### **HIGH-QUALITY HOUSING**

Simple design available in black and white

### **MAXIMUM FLEXIBILITY**

The TRACKSPOT can be rotated 90° vertically and 330° horizontally

### **MULTI-ZOOM**



The zoom lens of the trackspot allows mechanical stepless adjustment of the beam angle from 24° to 60°. This allows you to specifically highlight your highlight and optimally illuminate the room.

# TRACKSPOT


INDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
Trackspot V 3Ph., 10 / 15 / 20 W, 927 / 930 / 940, 24°-60°, black	●	20 W	220-240 V		1800 lm	90 lm/W	2700 K
					1980 lm	99 lm/W	3000 K
					1920 lm	96 lm/W	4000 K
Trackspot V 3Ph., 10 / 15 / 20 W, 927 / 930 / 940, 24°-60°, white	○	20 W	220-240 V		1800 lm	90 lm/W	2700 K
					1980 lm	99 lm/W	3000 K
					1920 lm	96 lm/W	4000 K
Trackspot V 3Ph., 25 / 30 / 35 W, 927 / 930 / 940, 24°-60°, black	●	35 W	220-240 V		3090 lm	88 lm/W	2700 K
					3470 lm	99 lm/W	3000 K
					3300 lm	94 lm/W	4000 K
Trackspot V 3Ph., 25 / 30 / 35 W, 927 / 930 / 940, 24°-60°, white	○	35 W	220-240 V		3090 lm	88 lm/W	2700 K
					3470 lm	99 lm/W	3000 K
					3300 lm	94 lm/W	4000 K



CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007655	159,00
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007654	159,00
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007657	179,00
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007656	179,00

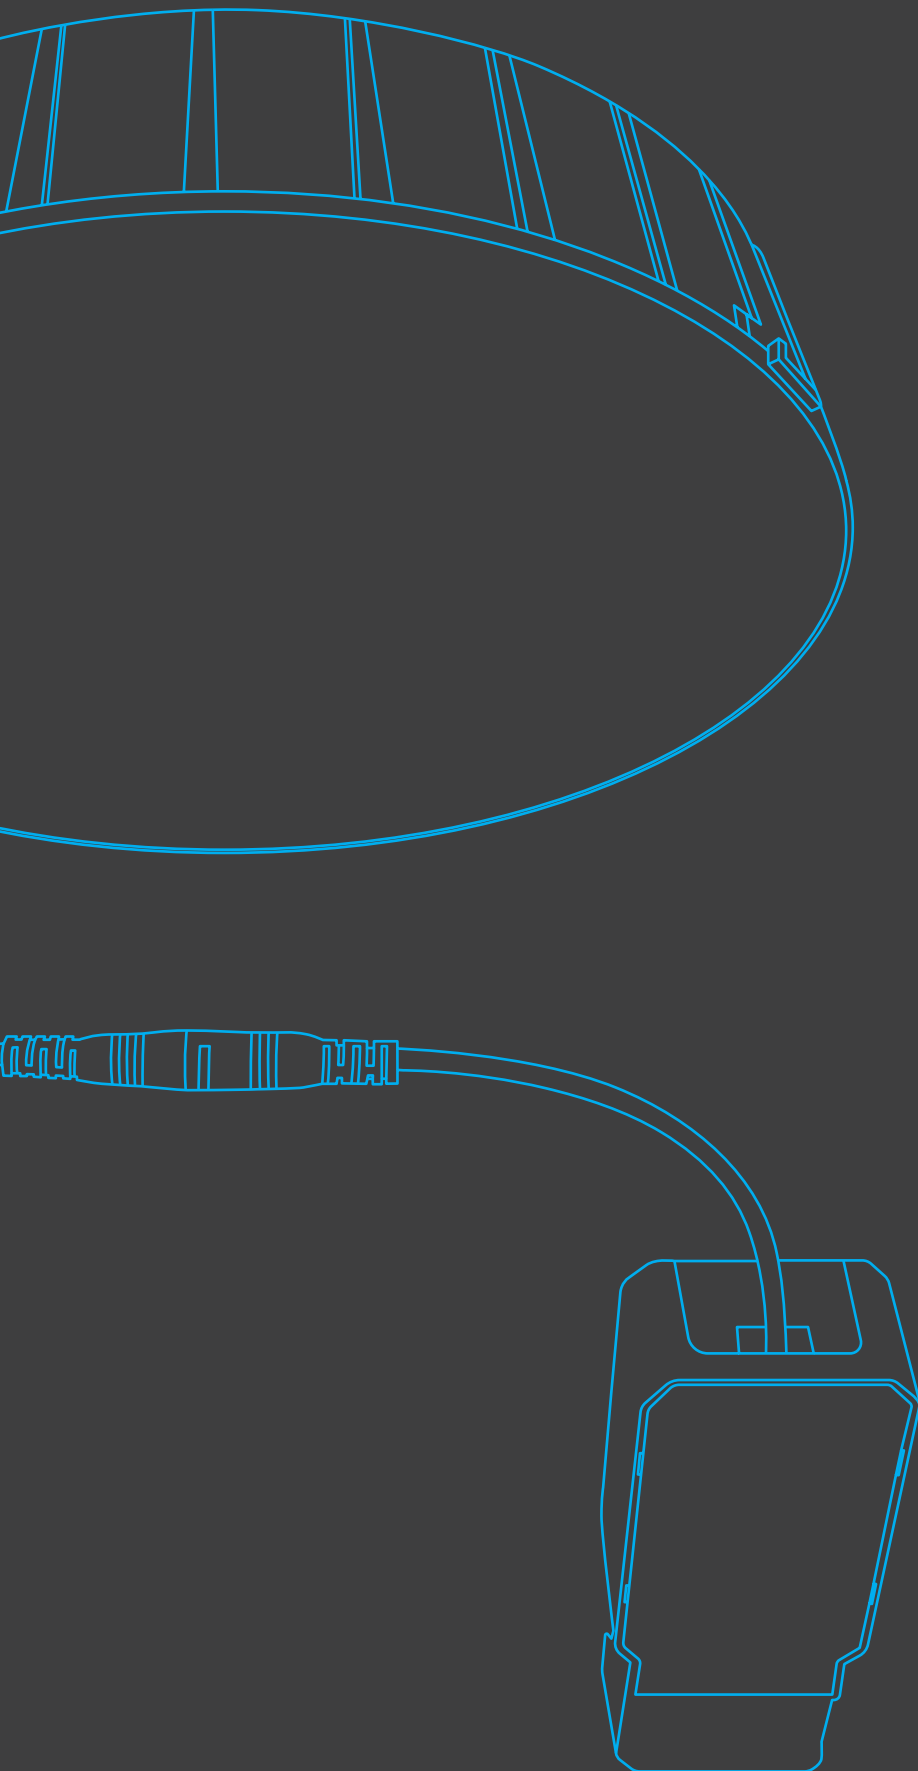

## COMBINE



DOWNLIGHT VALUE  
100 / 150 / 200

+



Flat or recessed covers  
in three sizes and  
two colours each

=



When purchasing a DOWNLIGHT  
the mounting frame is  
not included as standard.

# DOWNLIGHT



## PRODUCT ADVANTAGES


Simple change of light colour and light intensity by means of DIP switch

Easy change between the slightly recessed and the flat cover thanks to bayonet lock

More convenience during installation due to the integrated quick connector connection box of the LED driver

Less rework on the construction site due to common installation diameters of 100 mm, 150 mm and 200 mm

High energy saving thanks to efficiency of up to 126 lm/W

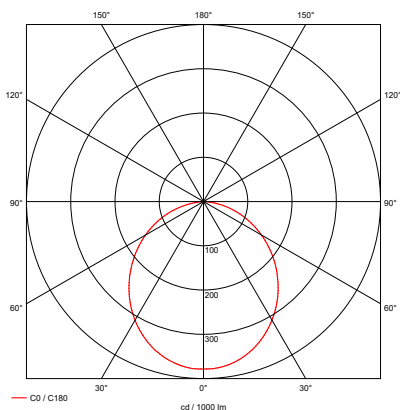

The graphic refers to the article 1007509 in 9 W and 3000 K.

## PRODUCT CHARACTERISTICS

Three downlights with switchable total wattages (except DOWNLIGHT V 100) and switchable colour temperatures in the most common installation diameters

Multi-Colour: 3000 K / 4000 K

CRI > 80

IP protection class: IP20 / IP54

## AREAS OF APPLICATION


Offices, corridors, stairwells

# DOWNLIGHT


INDOOR




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
DOWNLIGHT V 100 6 W, 830 / 840, IP54	●	6 W	220-240 V	□	610 lm	102 lm/W	3000 K
					640 lm	107 lm/W	4000 K
DOWNLIGHT V 150 9 / 15 W, 830 / 840, IP54	●	15 W	220-240 V	□	1750 lm	117 lm/W	3000 K
					1900 lm	127 lm/W	4000 K
DOWNLIGHT V 200 15 / 21 W, 830 / 840, IP54	●	21 W	220-240 V	□	2360 lm	112 lm/W	3000 K
					2490 lm	119 lm/W	4000 K




1007476, 1007477




1007478, 1007479




1007480, 1007481



1007482, 1007483










1007484, 1007485



1007486, 1007487




CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	105°	-	-	-	 L70B50	-	-	54*	02	1007508	45,00
>80	105°	-	-	-	 L70B50	-	-	54*	02	1007509	53,00
>80	105°	-	-	-	 L70B50	-	-	54*	02	1007510	60,00

\*IP20 rear side



Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
DOWNLIGHT V 100 flat cover <i>black</i>	●	-	-	-	1007477	5,00
DOWNLIGHT V 100 flat cover <i>white</i>	○	-	-	-	1007476	5,00
DOWNLIGHT V 100 recessed cover <i>black</i>	●	-	-	-	1007479	5,00
DOWNLIGHT V 100 recessed cover <i>white</i>	○	-	-	-	1007478	5,00
DOWNLIGHT V 150 flat cover <i>black</i>	●	-	-	-	1007481	7,00
DOWNLIGHT V 150 flat cover <i>white</i>	○	-	-	-	1007480	7,00
DOWNLIGHT V 150 recessed cover <i>black</i>	●	-	-	-	1007483	7,00
DOWNLIGHT V 150 recessed cover <i>white</i>	○	-	-	-	1007482	7,00
DOWNLIGHT V 200 flat cover <i>black</i>	●	-	-	-	1007485	10,00
DOWNLIGHT V 200 flat cover <i>white</i>	○	-	-	-	1007484	10,00
DOWNLIGHT V 200 recessed cover <i>black</i>	●	-	-	-	1007487	10,00
DOWNLIGHT V 200 recessed cover <i>white</i>	○	-	-	-	1007486	10,00

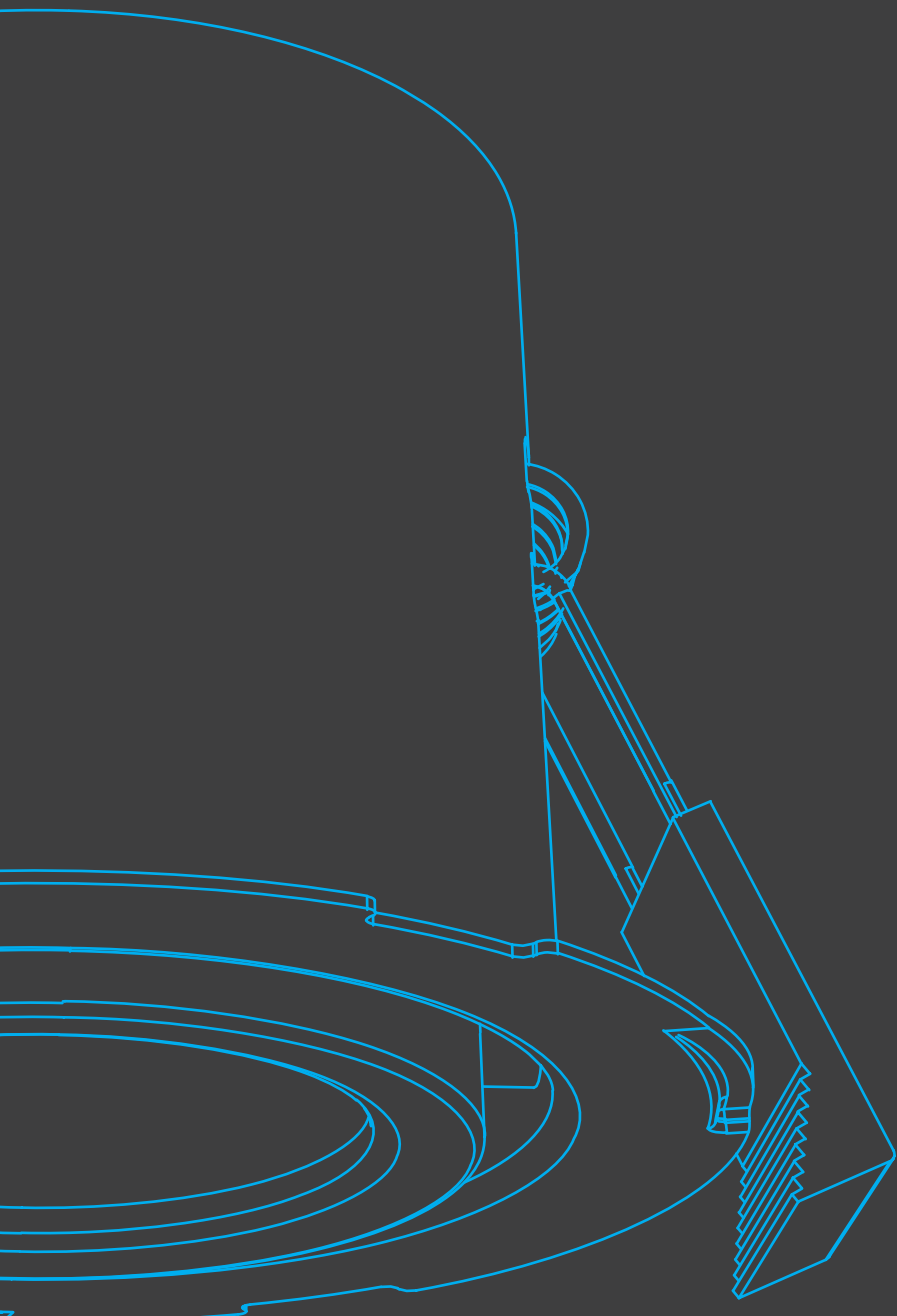

COMBINE



UNIVERSAL  
DOWNLIGHT



Front ring in the colours  
black, white, gold, gold matt  
and brushed aluminium



When purchasing a  
UNIVERSAL DOWNLIGHT,  
the front ring is not  
included as standard.



Would you like to learn  
more about this product?  
Watch the video now.

# UNIVERSAL DOWNLIGHT

## PRODUCT ADVANTAGES

Rigid and pivoting version with exchangeable covers

Switchable total wattage and colour temperatures


Low installation depth

Adapts visually and functionally to a wide variety of room situations

Easy to install thanks to quick-connector connection box



Also available  
in a multipack  
of 12

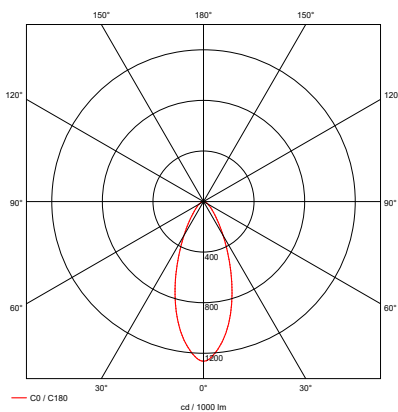

The graphic refers to the article  
1007095 in 8 W and 3000 K.

## PRODUCT CHARACTERISTICS

Powerful LED module with CRI>90

Switchable total wattage 5 W / 8 W

Multi-Colour: 2700 K / 3000 K / 4000 K / 6500 K

Round and square covers in five colours each available separately

For ceiling cut-out Ø 68 mm

## AREAS OF APPLICATION

Residential, office, shop

# CONFIGURE YOUR DOWNLIGHT

---

Unobtrusive and universally applicable: the UNIVERSAL DOWNLIGHT as a rigid and pivoting version are recessed lights that produce a targeted light with their narrow beam angle of 36 degrees. A wide range of colour temperature options (2700 K / 3000 K / 4000 K / 6500 K) can be selected via the CCT switch before installation. Natural colour reproduction is achieved with a CRI of over 90. The Quick Connector Box ensures the downlight is quick and easy to install. Complete your universal downlight with the separately available covers in round or square, each available in black, white, gold, gold matt and brushed aluminium.

## CHOOSE YOUR FAVOURITE ...

- 1 version (rigid or pivoting)
- 2 Cover (round or square, in the colours black, white, gold, gold matt and brushed aluminium)
- 3 Colour temperature (2700 K / 3000 K / 4000 K / 6500 K)
- 4 Total wattage (5 W / 8 W)

DONE!



# UNIVERSAL DOWNLIGHT

## UNIVERSAL DOWNLIGHT




Available as rigid version

## UNIVERSAL DOWNLIGHT MOVE



Available as a pivoting version

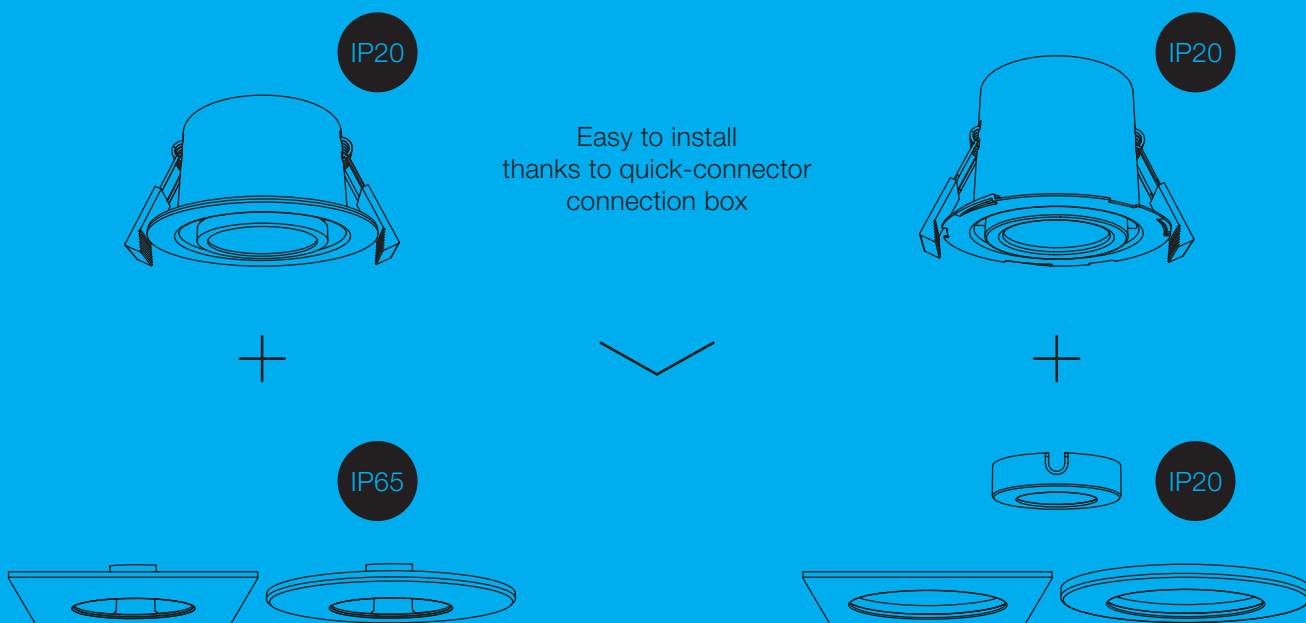

Exchangeable cover (round or square and in the colours  
black, white, gold, gold matt and brushed aluminium)

Adjustable colour temperature  
2700 K / 3000 K / 4000 K / 6500 K

Switchable total wattage  
5 W / 8 W

High light quality and colour reproduction  
thanks to LED with CRI>90

# UNIVERSAL DOWNLIGHT

INDOOR




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
UNIVERSAL DOWNLIGHT MOVE PHASE <i>IP20, pivoting, 5 / 8 W, 2700 / 3000 / 4000 / 6500 K, 38°, no cover</i>	●	8 W	220-240 V		560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
UNIVERSAL DOWNLIGHT PHASE <i>IP65, 5 / 8 W, 2700 / 3000 / 4000 / 6500 K, 38°, no cover</i>	●	8 W	220-240 V		560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K



L x W x H (mm):

88 x 88 x 35

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, black</i>	●	-	-	-	1007184	4,00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, white</i>	○	-	-	-	1007185	4,00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, gold</i>	●	-	-	-	1007187	4,50
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, gold matt</i>	●	-	-	-	1007194	4,50
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, aluminium</i>	●	-	-	-	1007186	4,50
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, black</i>	●	-	-	-	1007180	4,00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, white</i>	○	-	-	-	1007181	4,00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, gold</i>	●	-	-	-	1007183	4,50
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, gold matt</i>	●	-	-	-	1007193	4,50
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, aluminium</i>	●	-	-	-	1007182	4,50

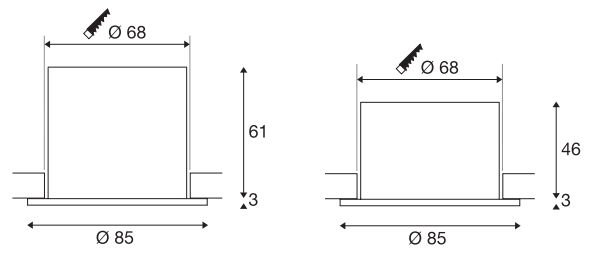

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>90	38°	-	30°	10	 L70B50	<28		20	02	1007090	27,00
>90	38°	-	-	10	 L70B50	<28		65*	02	1007095	26,50

\*IP20 rear side



Ø x L (mm):  
88 x 35

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, black		-	-	-	1007091	3,00
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, white		-	-	-	1007092	3,00
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, gold		-	-	-	1007094	3,50
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, gold matt		-	-	-	1007191	3,50
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, aluminium		-	-	-	1007093	3,50
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, black		-	-	-	1007096	3,00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, white		-	-	-	1007097	3,00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, gold		-	-	-	1007099	3,50
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, gold matt		-	-	-	1007192	3,50
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, aluminium		-	-	-	1007098	3,50

# UNIVERSAL DOWNLIGHT

## RECESSED CEILING LIGHTS




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
Set consisting of 12 x 1007090 UNIVERSAL DOWNLIGHT MOVE PHASE, IP20, 38° + 1007091 UNIVERSAL DOWNLIGHT Cover, IP20, black	●	8 W	220-240 V	□	560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
Set consisting of 12 x 1007090 UNIVERSAL DOWNLIGHT MOVE PHASE, IP20, 38° + 1007092 UNIVERSAL DOWNLIGHT Cover, IP20, white	○	8 W	220-240 V	□	560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
Set consisting of 12 x 1007095 UNIVERSAL DOWNLIGHT PHASE IP65, 38° + 1007096 UNIVERSAL DOWNLIGHT Cover, IP65, black	●	8 W	220-240 V	□	560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
Set consisting of 12 x 1007095 UNIVERSAL DOWNLIGHT PHASE, IP65, 38° +1007097 UNIVERSAL DOWNLIGHT Cover, IP65, white	○	8 W	220-240 V	□	560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K









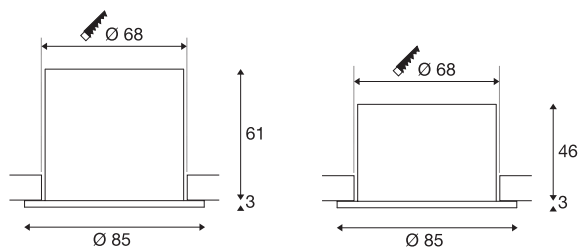






  


---

 12 downlights and  
 12 matching rings  
 are included in  
 each set



	CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
	>90	38°	-	30°	10	 L70B50	<28		20	02	1007273	360,00
	>90	38°	-	30°	10	 L70B50	<28		20	02	1007274	360,00
	>90	38°	-	-	10	 L70B50	<28		20 / 65	02	1007271	354,00
	>90	38°	-	-	10	 L70B50	<28		20 / 65	02	1007272	354,00

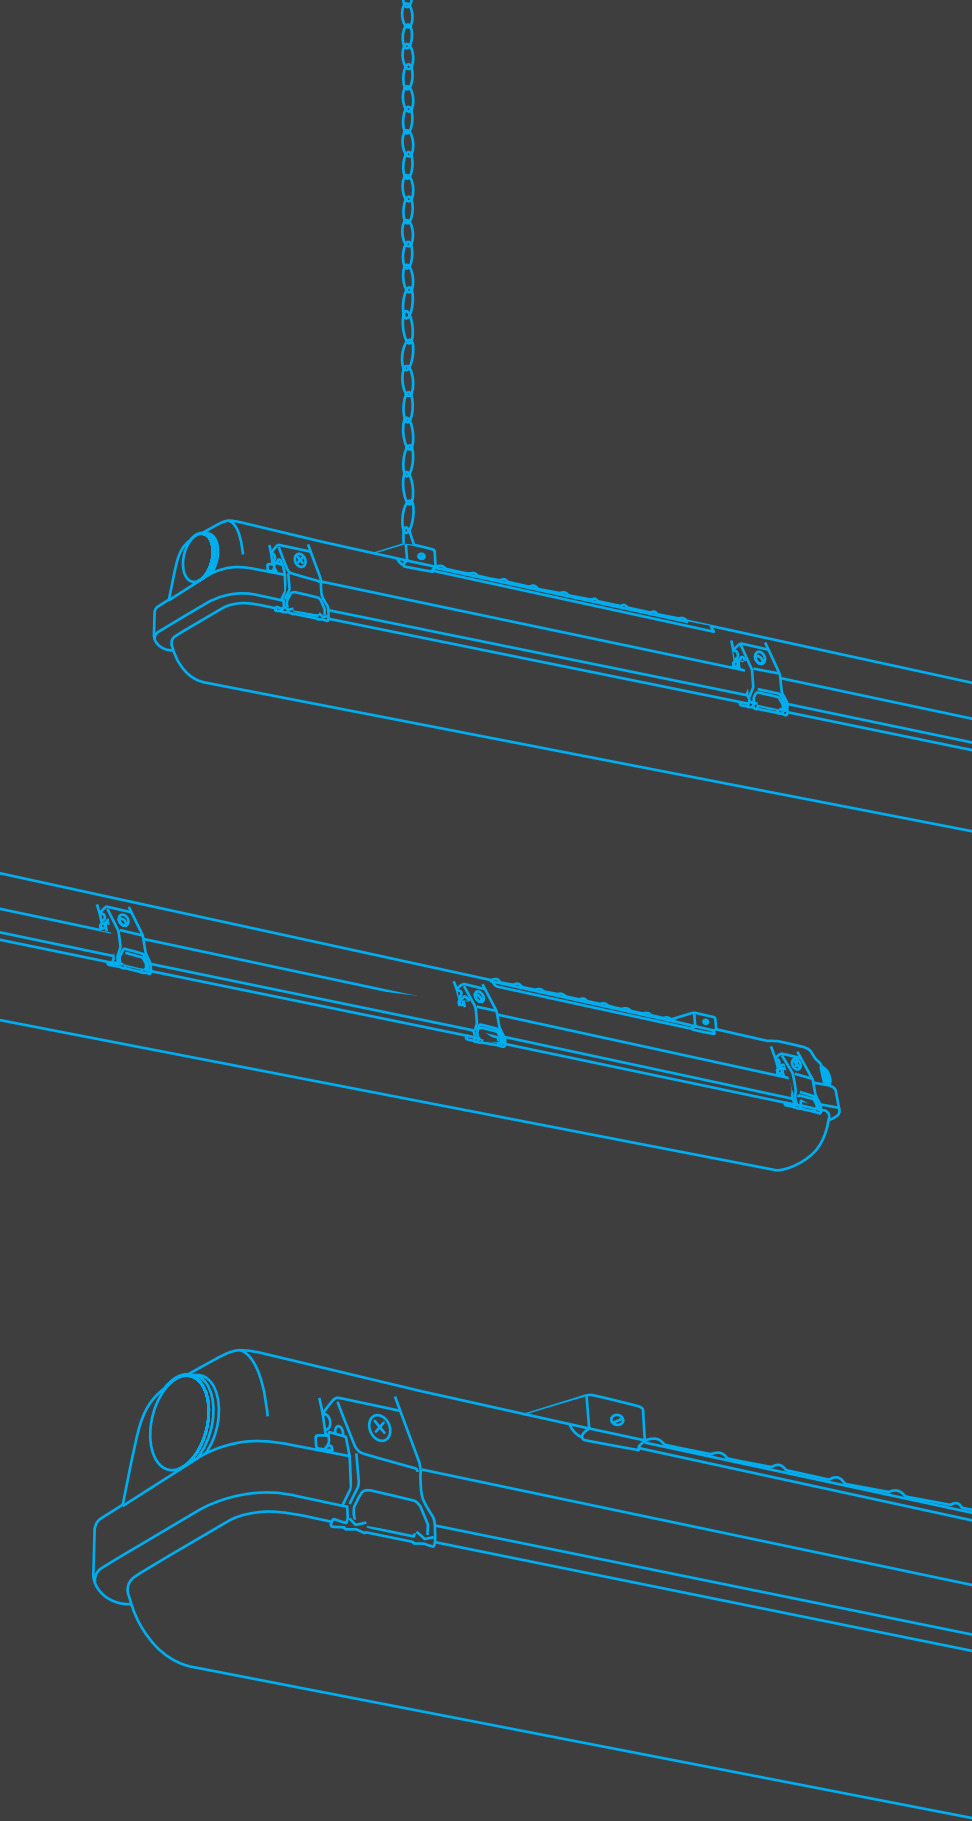

Can be used as  
surface-mounted ceiling light  
or pendant light




# WATERPROOF

## PRODUCT ADVANTAGES

Fully dust-tight and protected against strong jets of water by IP65  
Easy change of colour temperature and total wattage via DIP switch  
Tool-free through-wiring of two lights thanks to the supplied set  
High convenience during installation due to removable gear tray  
Energy savings of up to 60% compared to fluorescent lights



Multifunctional light  
with IP65

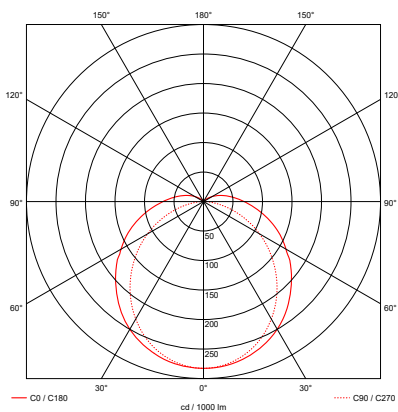

The graphic refers to article  
1007490 in 32 W and 3000 K.

## PRODUCT CHARACTERISTICS

Wet room light in two lengths: 1200 mm and 1500 mm  
Switchable total wattage 18 W / 32 W  
Multi-Colour: 3000 K / 4000 K  
Available as DALI version with fixed total wattage and 4000 K  
Excellent efficiency with over 120 lm/W





## AREAS OF APPLICATION



Industrial rooms, garages, workshop

# WATERPROOF




INDUSTRY



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
WATERPROOF V 1200 <i>18 / 32 W, 830 / 840, IP66</i>	●	32 W	220-240 V		3860 lm	121 lm/W	3000 K
					4130 lm	129 lm/W	4000 K
WATERPROOF V DALI 1200 <i>36 W, 840, IP66</i>	●	36 W	220-240 V		4470 lm	124 lm/W	4000 K
WATERPROOF V 1500 <i>26 / 45 W, 830 / 840, IP66</i>	●	45 W	220-240 V		5670 lm	126 lm/W	3000 K
					5970 lm	133 lm/W	4000 K
WATERPROOF V DALI 1500 <i>36 W, 840, IP66</i>	●	50 W	220-240 V		6640 lm	132 lm/W	4000 K



CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	-	-	-	-	 L80B10	-	-	66	08	1007490	80,00
>80	-	-	-	-	 L80B10	-		66	08	1007493	180,00
>80	-	-	-	-	 L80B10	-	-	66	08	1007491	95,00
>80	-	-	-	-	 L80B10	-		66	08	1007495	195,00

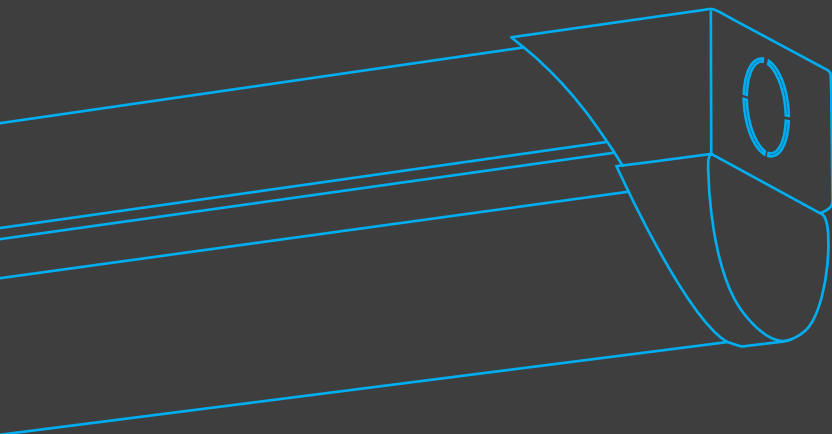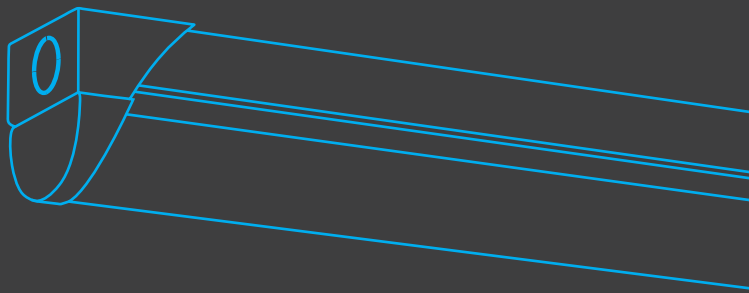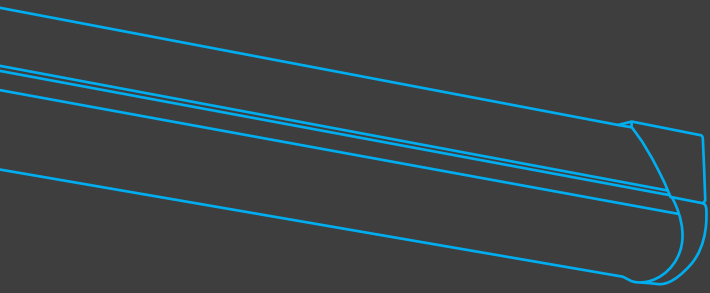

3000 K



4000 K



5700 K

# INDUSTRY BATTEN



## PRODUCT ADVANTAGES

Easy change of colour temperature and total wattage via DIP switch

Outstanding efficiency with up to 140 lm/W

Replacement product for the conventional T8 lights with up to 5800 lm

Tool-free electrical connection thanks to pressure clamp

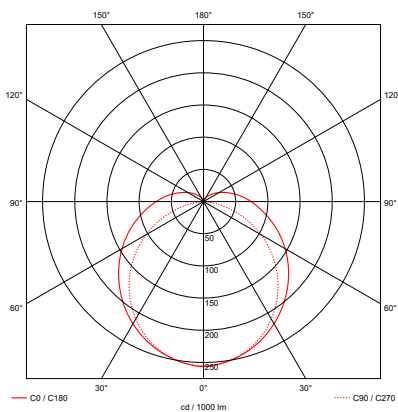

The graphic refers to the article 1007507 in 42 W and 3000 K.

## PRODUCT CHARACTERISTICS

Available in two sizes: 1200 mm and 1500 mm

Switchable total wattage

Multi-Colour: 3000 K / 4000 K / 5700 K

CRI>80

## AREAS OF APPLICATION

Workshop, industrial rooms, cellar


# INDUSTRY BATTEN







INDUSTRY

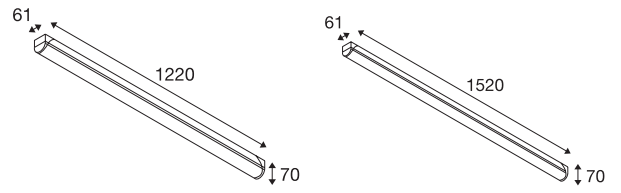


Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
INDUSTRY BATTEN V 1200 <i>18 / 32 W, 830 / 840 / 857</i>	○	32 W	220-240 V	⊕	3910 lm	122 lm/W	3000 K
					4350 lm	136 lm/W	4000 K
					4140 lm	129 lm/W	5700 K
INDUSTRY BATTEN V 1500 <i>22 / 42 W, 830 / 840 / 857</i>	○	42 W	220-240 V	⊕	5220 lm	124 lm/W	3000 K
					5760 lm	137 lm/W	4000 K
					5460 lm	130 lm/W	5700 K






CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	150°	-	-	-	 L70B50	-	-	20	04	1007506	70,00
>80	150°	-	-	-	 L70B50	-	-	20	04	1007507	85,00

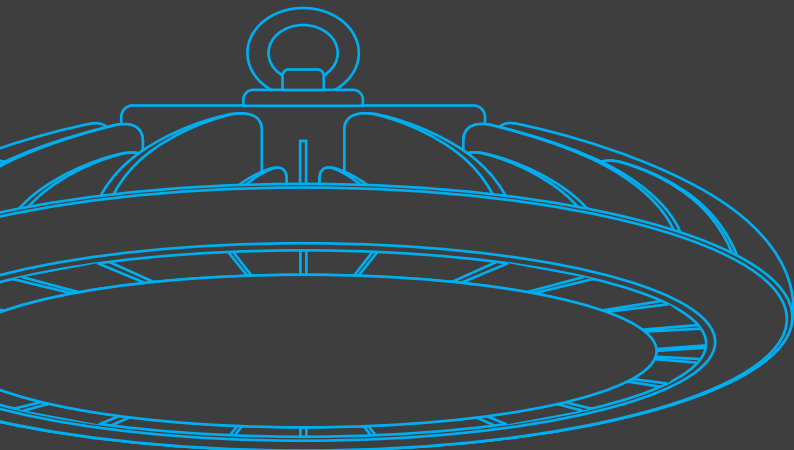

With suspension kit

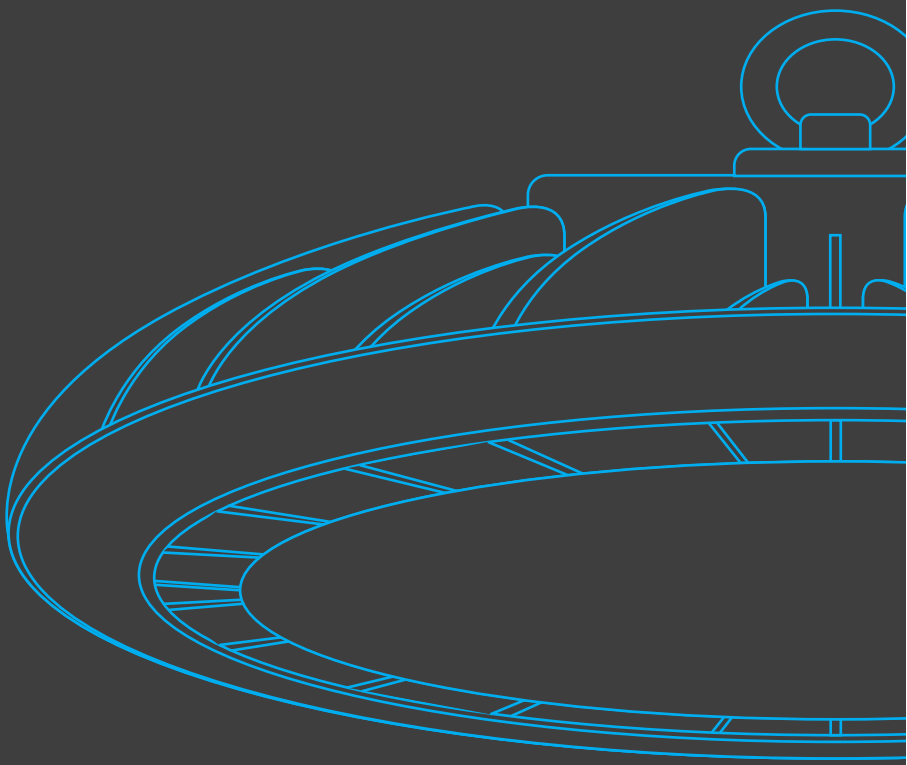

With reflector 100°



With mounting bracket

# HIGHBAY

## PRODUCT ADVANTAGES



Energy savings of up to 65 % compared to conventional high-bay lights

Easy change of total wattage via DIP switch

Additional reflector available to reduce glare

Optimised weight and size due to compact design

High-quality appearance and modern design

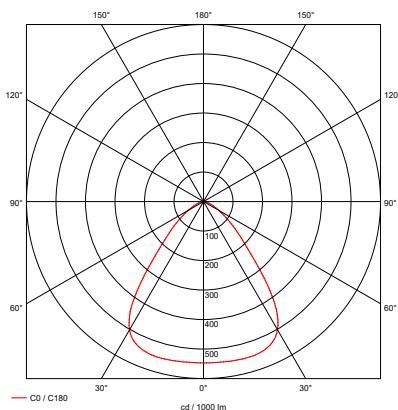

The graphic refers to article 1007679 in 200 W.

## PRODUCT CHARACTERISTICS

Switchable total wattage: 100 W / 120 W / 170 W / 200 W

Luminous flux up to 32000 lm

4000 K

Robust and universally applicable thanks to IK08 and IP65

## AREAS OF APPLICATION


Airports, industrial halls, warehouses

# HIGHBAY

INDUSTRY



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
HIGHBAY V 330 100 / 120 / 170 / 200 W, 840, 90°	●	200 W	220-240 V	⊕	32000 lm	160 lm/W	4000 K

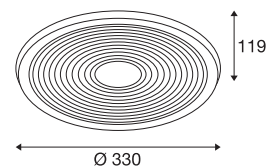

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	90°	-	-	-	L80B50	-	-	65	08	1007679	235,00



Ø x H (mm):  
435 x 130




Ø x L (mm):  
19,2 x 1500



L x W x H (mm):  
202,5 x 49,6 x 132

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
HIGHBAY V 330 reflector 100°		-	-	-	1007677	50,00
HIGHBAY V suspension set 1500 mm	-	-	-	-	1007676	24,00
HIGHBAY V mounting bracket 60° adjustable black		-	-	-	1007678	24,00

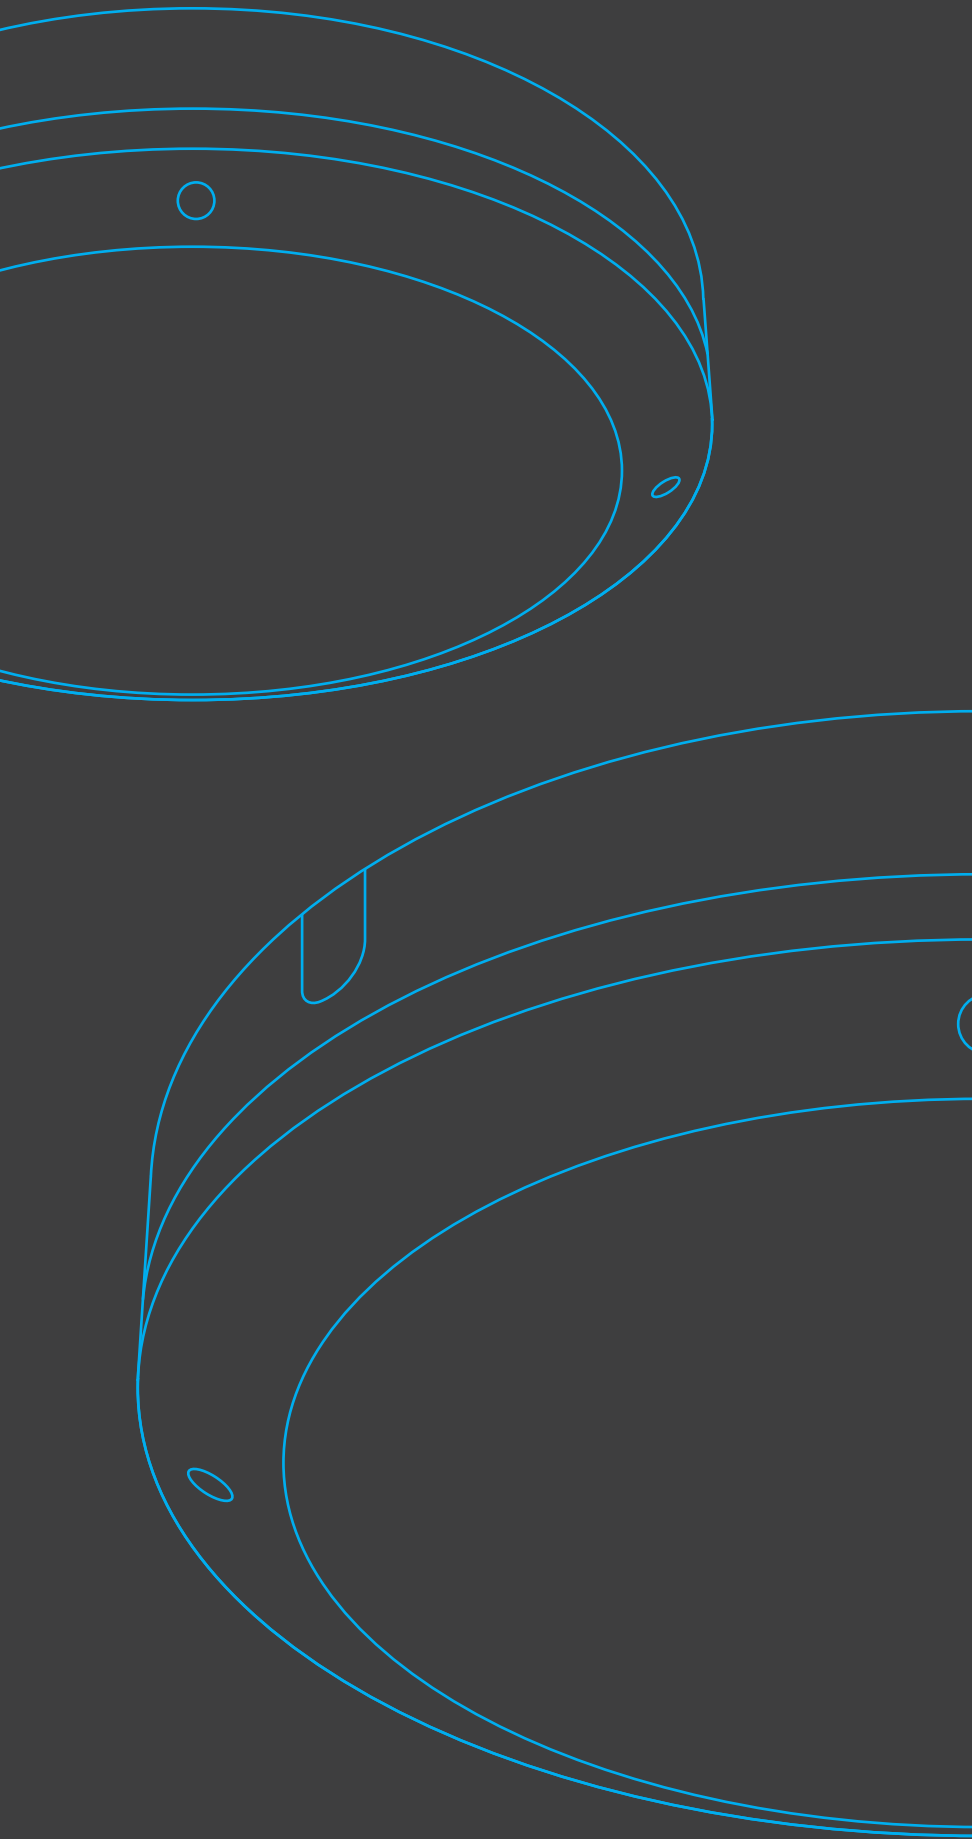

3000 K




4000 K




6500 K

# OUTDOOR BULKHEAD



## PRODUCT ADVANTAGES

- Robust outdoor light with a high protection against vandalism thanks to IK10
- Easy change of colour temperature via DIP switch
- High convenience during installation due to removable gear tray
- High-quality light with homogeneous light emission
- Energy savings of up to 55 % compared to lights with compact fluorescent lamps (CFLs)

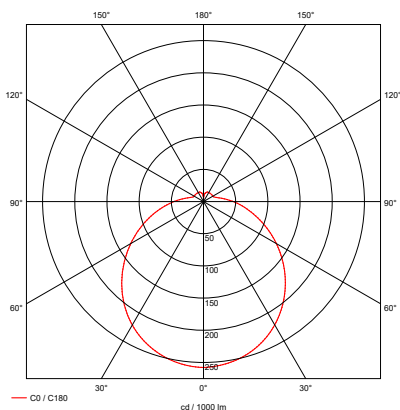

The graphic refers to the article 1007514 in 3000 K.

## PRODUCT CHARACTERISTICS

- Excellent protection thanks to IP65 and IK10
- Multi-Colour: 3000 K / 4000 K / 6500 K
- CRI > 80
- Additional version with microwave sensor available

## AREAS OF APPLICATION

Public areas, facades, subways


# OUTDOOR BULKHEAD







OUTDOOR




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840, IP65, IK10</i>	●	20 W	220-240 V		1750 lm	87,5 lm/W	3000 K
					1850 lm	92,5 lm/W	4000 K
					1900 lm	95 lm/W	6500 K
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840, IP65, IK10, Sensor</i>	●	20 W	220-240 V		1750 lm	87,5 lm/W	3000 K
					1850 lm	92,5 lm/W	4000 K
					1900 lm	95 lm/W	6500 K





	CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
	>80	110°	-	-	-	 L80B50	-	-	65	10	1007514	85,00
	>80	110°	-	-	-	 L80B50	-	-	65	10	1007515	110,00

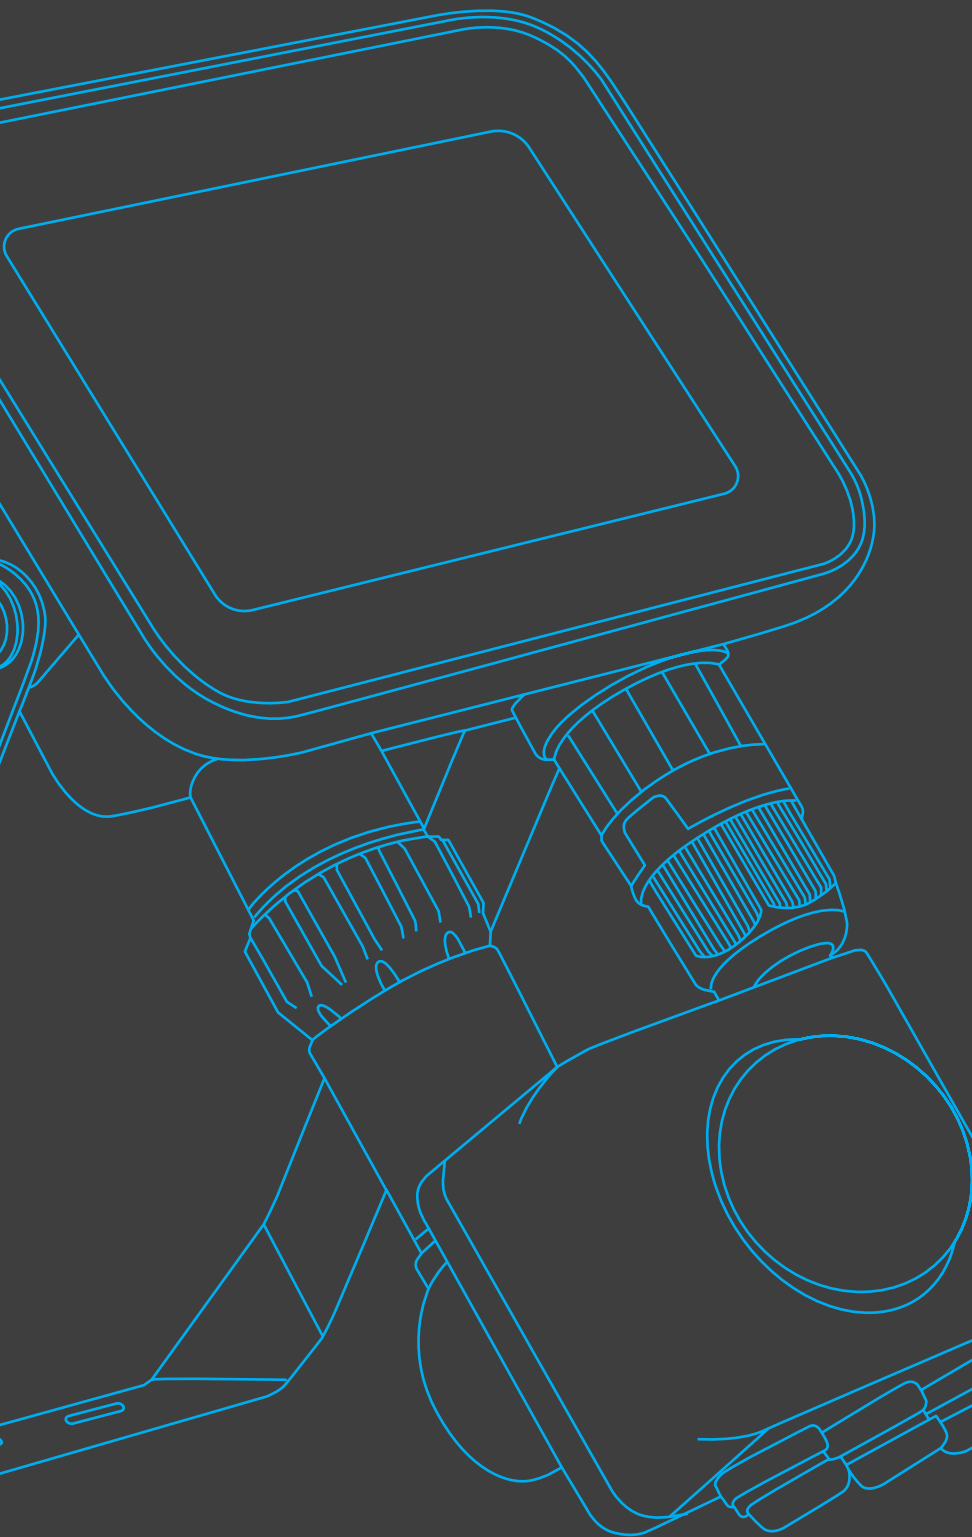

+



=



Motion sensor  
available separately

# FLOODI



## PRODUCT ADVANTAGES

Energy savings of up to 90% compared to halogen lamp spotlights

Programmable sensor (available as accessory) enables illumination to be optimised as required

Easy adjustment of sensor range, daylight detection and dwell time

Easy installation thanks to integrated waterproof connection terminal

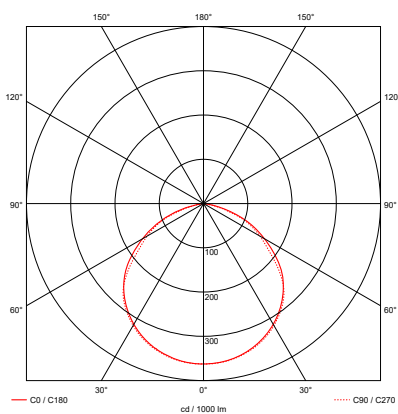

The graphic refers to  
article 1006193.

## PRODUCT CHARACTERISTICS

Available in three sizes and power variants: 9.3 W / 30 W / 48 W

3000 K

High protection thanks to IP65 and IK06

CRI>80

## AREAS OF APPLICATION


Area lighting, construction sites

# FLOODI

OUTDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
FLOODI S <i>9,3 W, 3000 K, 100°, anthracite / transparent</i>	●	9.3	220-240	⊕	1040 lm	111 lm/W	3000 K
FLOODI M <i>30 W, 3000 K, 100°, anthracite / transparent</i>	●	30	220-240	⊕	2980 lm	99 lm/W	3000 K
FLOODI L <i>48 W, 3000 K, 100°, anthracite / transparent</i>	●	48	220-240	⊕	5150 lm	107 lm/W	3000 K

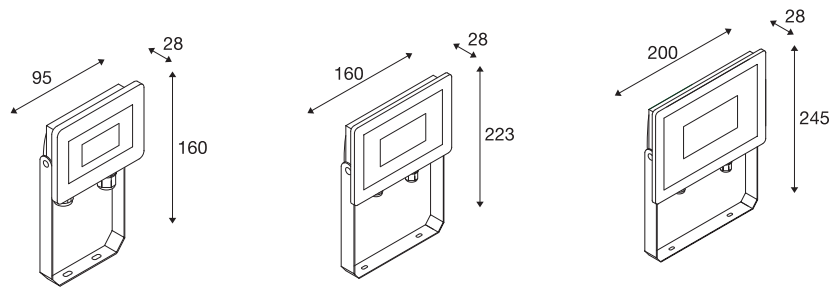


CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	100°	-	-	-	 L70B50	-	-	65	06	1006191	30,00
>80	100°	-	-	-	 L70B50	-	-	65	06	1006192	45,00
>80	100°	-	-	-	 L70B50	-	-	65	06	1006193	60,00



L x W x H (mm):  
44 x 69 x 57



Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
FLOODI motion sensor black		220-240 V	-	-	1006326	29,00

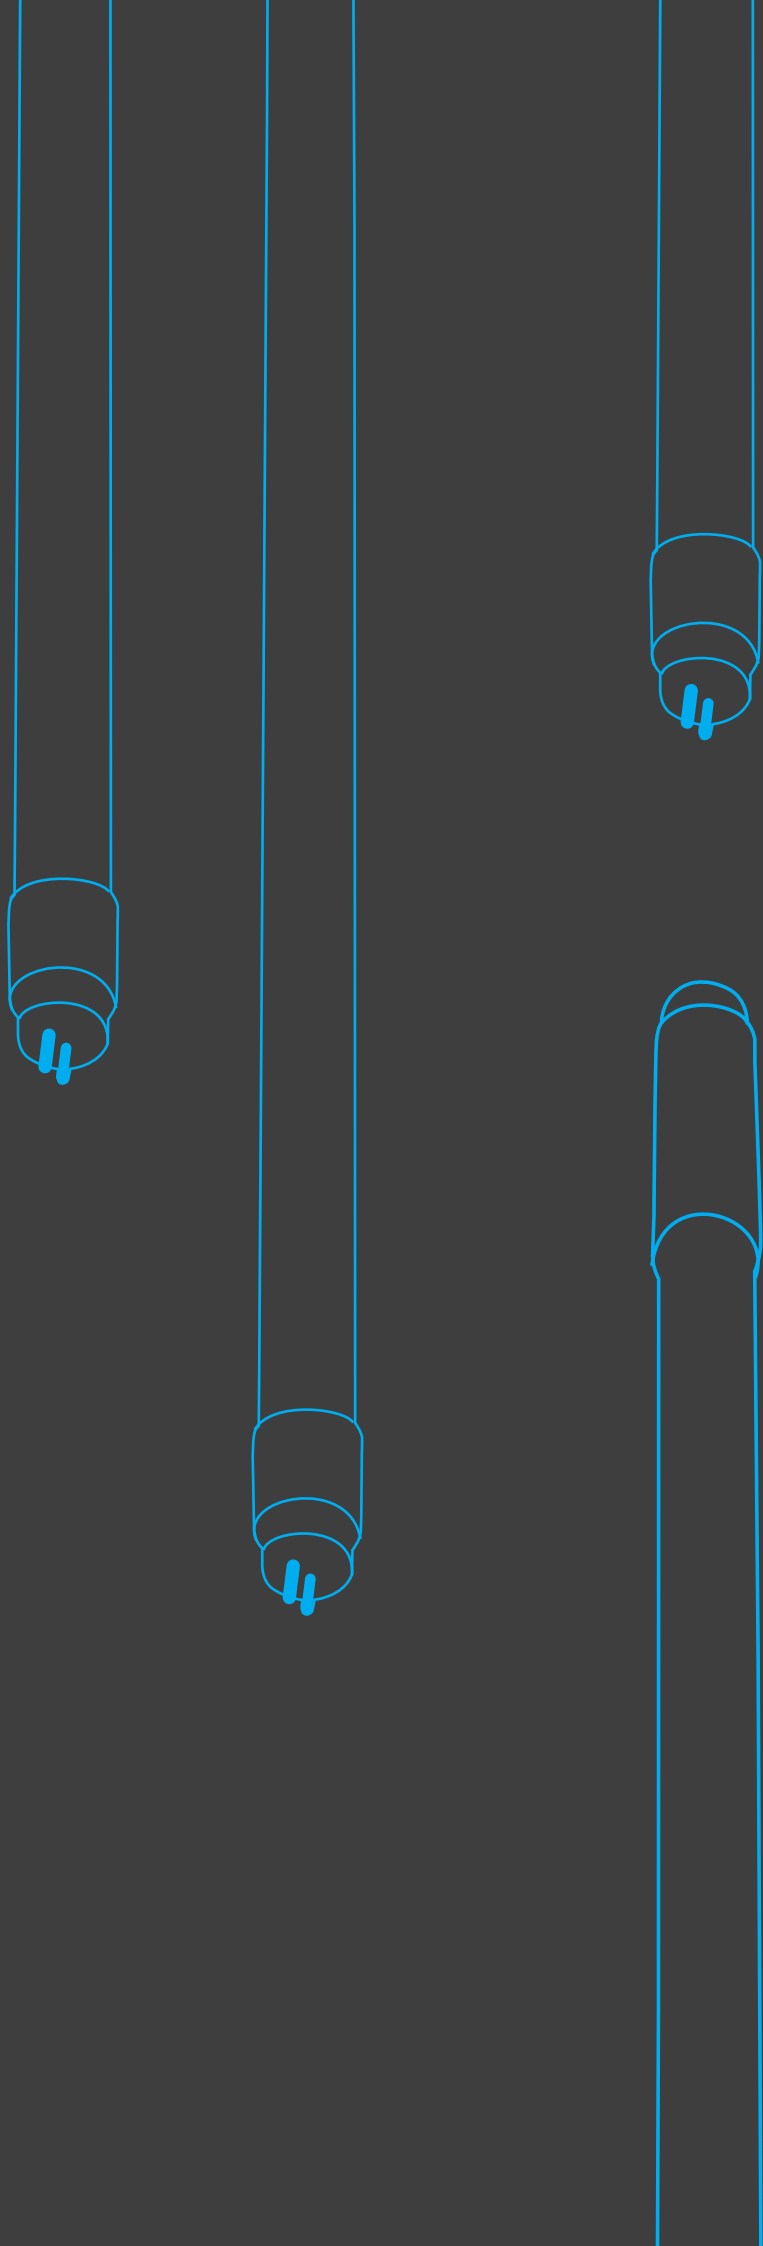

3000 K  
4000 K  
6500 K

# LED TUBE

## PRODUCT ADVANTAGES


EU-compliant LED replacement products for linear fluorescent lamps T5 and T8

High energy efficiency up to 150 lm/W

Splinter protection due to high-quality PET coating

Glass tubes prevent the product from sagging

Energy saving up to 60% compared to T8 fluorescent lamps

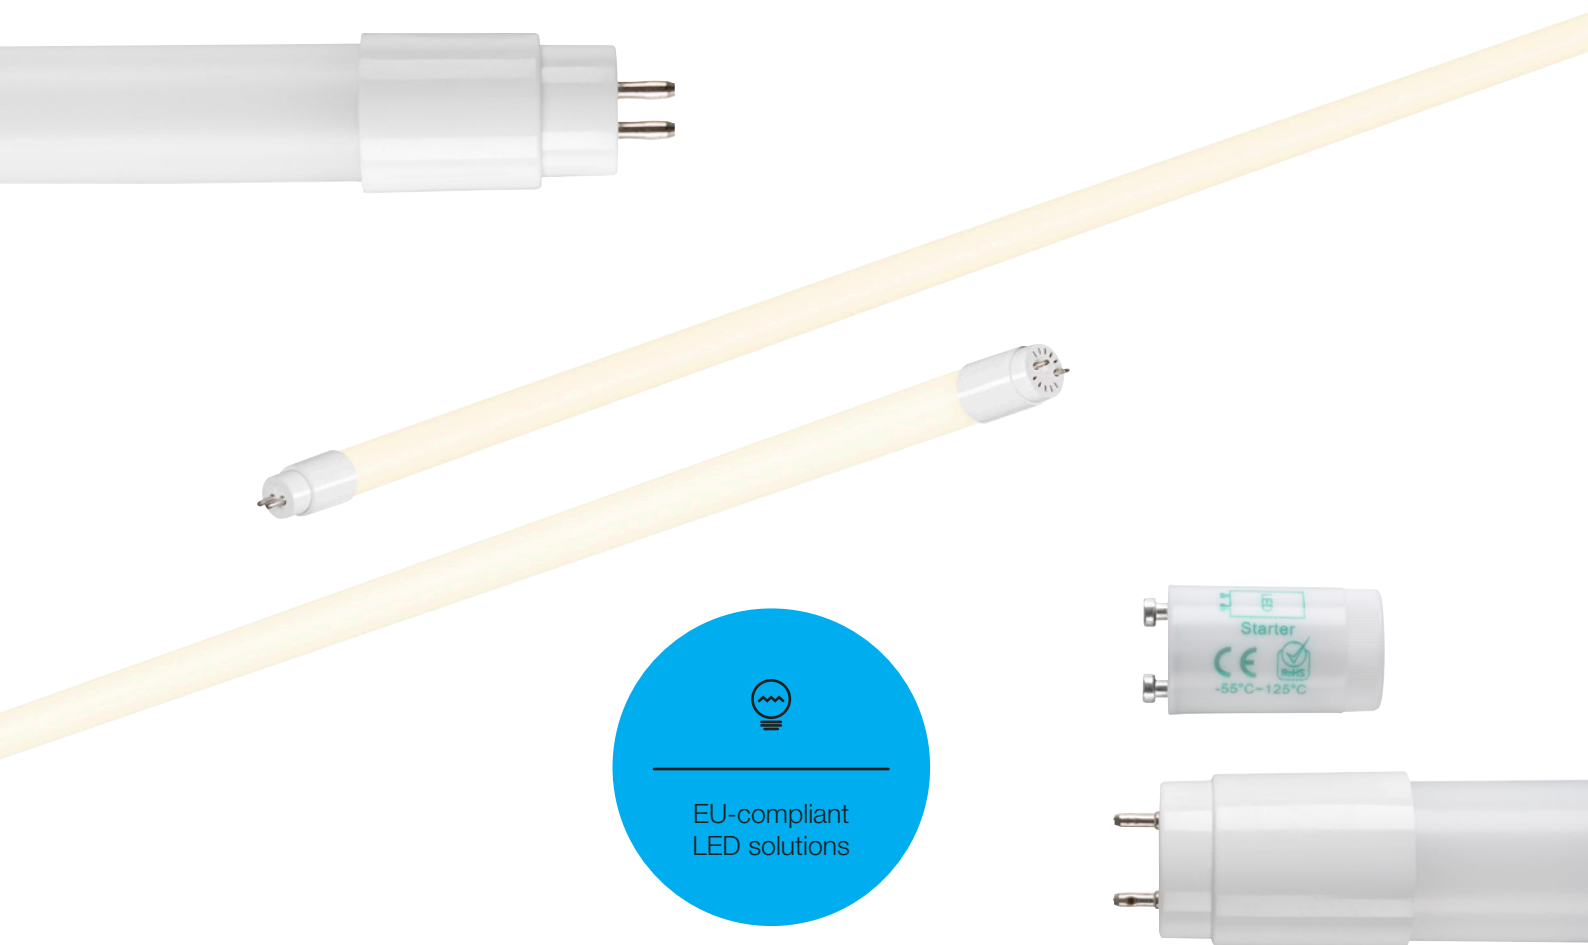

## PRODUCT CHARACTERISTICS

All variants available in two sizes: 1200 mm and 1500 mm

Available colour temperatures: 3000 K, 4000 K, 6500 K

IP20

CRI>80

Light distribution: 200°

## AREAS OF APPLICATION

Industry, supermarkets, garages









































# LED TUBE







## LAMP




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
LED Tube V T8 <i>Mains &amp; Magnetic 1200, 16 W, 830</i>	○	16 W	220-240 V	-	1850 lm	116 lm/W	3000 K
LED Tube V T8 <i>Mains &amp; Magnetic 1200, 16 W, 840</i>	○	16 W	220-240 V	-	2000 lm	125 lm/W	4000 K
LED Tube V T8 <i>Mains &amp; Magnetic 1200, 16 W, 865</i>	○	16 W	220-240 V	-	2000 lm	125 lm/W	6500 K
LED Tube V T8 <i>Mains &amp; Magnetic 1500, 22 W, 830</i>	○	22 W	220-240 V	-	2500 lm	114 lm/W	3000 K
LED Tube V T8 <i>Mains &amp; Magnetic 1500, 22 W, 840</i>	○	22 W	220-240 V	-	2700 lm	123 lm/W	4000 K
LED Tube V T8 <i>Mains &amp; Magnetic 1500, 22 W, 865</i>	○	22 W	220-240 V	-	2700 lm	123 lm/W	6500 K
LED Tube C T8 <i>Mains &amp; Magnetic 1200, 16 W, 830</i>	○	16 W	220-240 V	-	2200 lm	138 lm/W	3000 K
LED Tube C T8 <i>Mains &amp; Magnetic 1200, 16 W, 840</i>	○	16 W	220-240 V	-	2400 lm	150 lm/W	4000 K
LED Tube C T8 <i>Mains &amp; Magnetic 1200, 16 W, 865</i>	○	16 W	220-240 V	-	2400 lm	150 lm/W	6500 K
LED Tube C T8 <i>Mains &amp; Magnetic 1500, 24 W, 830</i>	○	24 W	220-240 V	-	3300 lm	138 lm/W	3000 K
LED Tube C T8 <i>Mains &amp; Magnetic 1500, 24 W, 840</i>	○	24 W	220-240 V	-	3600 lm	150 lm/W	4000 K
LED Tube C T8 <i>Mains &amp; Magnetic 1500, 24 W, 865</i>	○	24 W	220-240 V	-	3600 lm	150 lm/W	6500 K
LED Tube C T5 <i>Mains 1200, 26 W, 830</i>	○	26 W	220-240 V	-	3600 lm	138 lm/W	3000 K
LED Tube C T5 <i>Mains 1200, 26 W, 840</i>	○	26 W	220-240 V	-	3900 lm	150 lm/W	4000 K
LED Tube C T5 <i>Mains 1200, 26 W, 865</i>	○	26 W	220-240 V	-	3900 lm	150 lm/W	6500 K
LED Tube C T5 <i>Mains 1500, 34 W, 830</i>	○	34 W	220-240 V	-	4600 lm	135 lm/W	3000 K
LED Tube C T5 <i>Mains 1500, 34 W, 840</i>	○	34 W	220-240 V	-	5100 lm	150 lm/W	4000 K
LED Tube C T5 <i>Mains 1500, 34 W, 865</i>	○	34 W	220-240 V	-	5100 lm	150 lm/W	6500 K



CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>80	-	-	-	-	 L70B50	-		20	-	1007778	9,00
>80	-	-	-	-	 L70B50	-		20	-	1007779	9,00
>80	-	-	-	-	 L70B50	-		20	-	1007780	9,00
>80	-	-	-	-	 L70B50	-		20	-	1007781	11,00
>80	-	-	-	-	 L70B50	-		20	-	1007782	11,00
>80	-	-	-	-	 L70B50	-		20	-	1007783	11,00
>80	-	-	-	-	 L70B50	-		20	-	1007784	14,00
>80	-	-	-	-	 L70B50	-		20	-	1007785	14,00
>80	-	-	-	-	 L70B50	-		20	-	1007786	14,00
>80	-	-	-	-	 L70B50	-		20	-	1007787	16,00
>80	-	-	-	-	 L70B50	-		20	-	1007788	16,00
>80	-	-	-	-	 L70B50	-		20	-	1007789	16,00
>80	-	-	-	-	 L70B50	-		20	-	1007796	35,00
>80	-	-	-	-	 L70B50	-		20	-	1007797	35,00
>80	-	-	-	-	 L70B50	-		20	-	1007798	35,00
>80	-	-	-	-	 L70B50	-		20	-	1007799	42,00
>80	-	-	-	-	 L70B50	-		20	-	1007800	42,00
>80	-	-	-	-	 L70B50	-		20	-	1007801	42,00

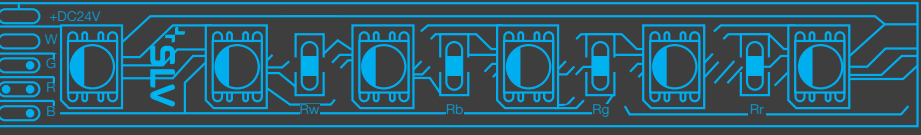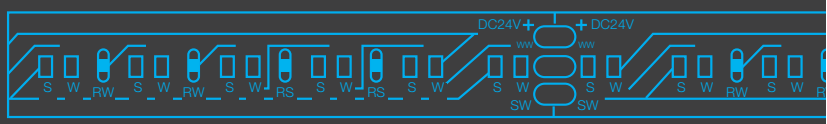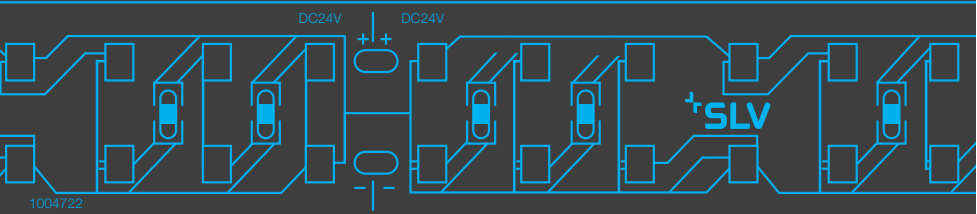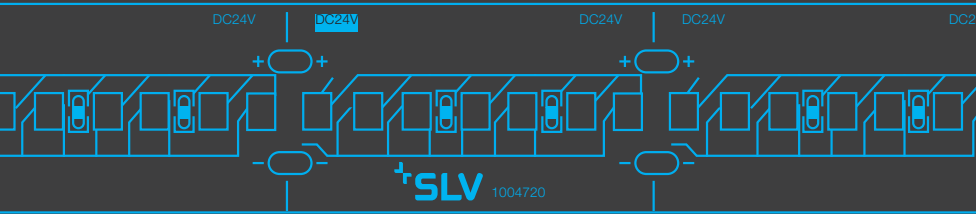

With RGB+W or  
TUNEABLE WHITE  
function

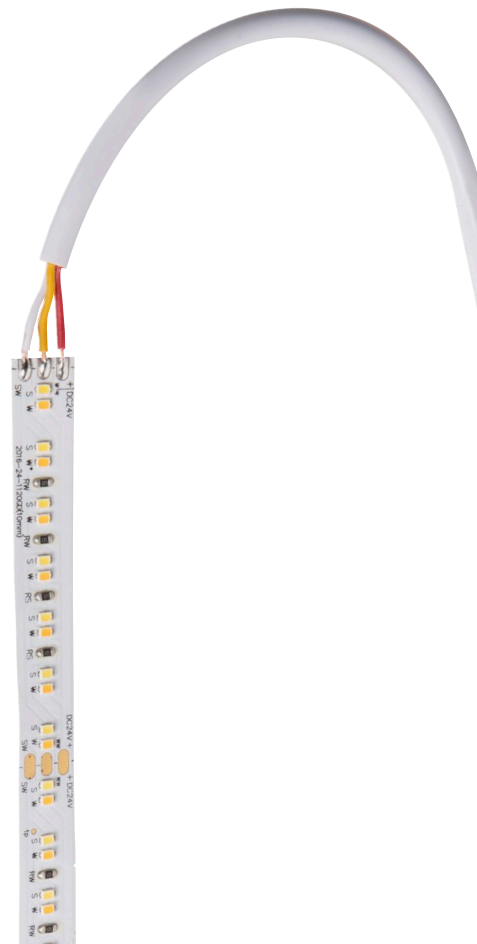

# GRAZIA

## PRODUCT ADVANTAGES

Wide range of high-quality LED strips for indirect lighting

Simple assembly thanks to pre-wired feed cables and high-quality 3M adhesive tape

Gold-plated solder pads simplify the soldering of cables



Outstanding  
colour rendering  
index CRI>90

## PRODUCT CHARACTERISTICS

Flexible and cuttable

Smallest divisible unit between 36 mm and 100 mm, depending on product variant

Dimmable with SLV LED drivers

CRI>90

Pre-soldered cables at the ends

## AREAS OF APPLICATION

Hotels, office, fashion shops

L x W x H:

5000 x 10 x 1,2 mm



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA FLEXSTRIP LED 24 V, 10 mm, 5 m	○	-	24 V	III	3500 lm	-	2700 K
					3500 lm		3000 K
					3750 lm		4000 K

L x W x H:

5000 x 10 x 1,2 mm



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA PRO FLEXSTRIP 24 V, 10 mm, 5 m	○	-	24 V	III	6500 lm	-	2700 K
					6500 lm		3000 K
					7000 lm		4000 K
GRAZIA PRO FLEXSTRIP 24 V, 10 mm, 5 m	○	-	24 V	III	8500 lm	-	2700 K
					8500 lm		3000 K
					9100 lm		4000 K
					9100 lm		6500 K

L x W x H:

5000 x 20 x 1,5 mm








Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA PRO MAX FLEXSTRIP 24 V, 20 mm, 5 m	○	-	24 V	III	12500 lm	-	3000 K
					13000 lm		4000 K
GRAZIA PRO MAX FLEXSTRIP 24 V, 20 mm, 5 m, 20000 lm	○	-	24 V	III	20000 lm	-	3000 K
					21400 lm		4000 K







L x W x H:







5000 x 10 x 1,2 mm    5000 x 12 x 2,2 mm









Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA PRO FLEXSTRIP 24 V, 10 mm, 2700-6500 K	○	-	24 V	III	-	-	D2W 2700-6500 K
GRAZIA PRO FLEXSTRIP 24 V, 12 mm, RGBW	○	-	24 V	III	-	-	-

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>90	120°	-	-	-		-	-	20	-	1004708	75,00
										1004709	75,00
										1004710	75,00

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>90	120°	-	-	-		-	-	20	-	1004712	131,00
										1004713	131,00
										1004714	131,00
>90	120°	-	-	-		-	-	20	-	1004716	151,00
										1004717	151,00
										1004718	151,00
										1004719	151,00

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>90	120°	-	-	-		-	-	20	-	1004720	215,00
										1004721	215,00
>90	120°	-	-	-		-	-	20	-	1004722	432,00
										1004723	432,00

CRI					Service life	UGR	Control	IP	IK	Prod no.	EUR
>90	120°	-	-	-		-	-	20	-	1004725	158,00
>90	120°	-	-	-		-	-	20	-	1004727	151,00

# FLEX STRIPS

## OVERVIEW

### GRAZIA LED

1004708  
1004709  
1004710

70 LEDs/m

### GRAZIA PRO

1004712  
1004713  
1004714




126 LEDs/m

### GRAZIA PRO

1004716  
1004717  
1004718  
1004719

168 LEDs/m

5000  
mm

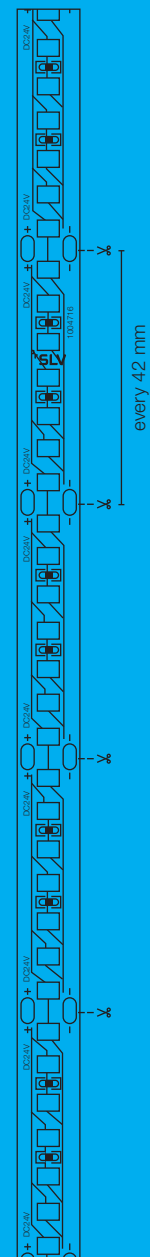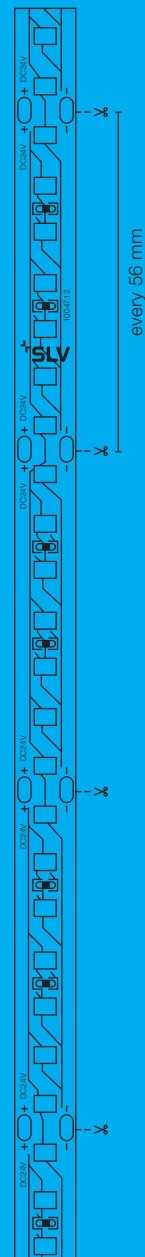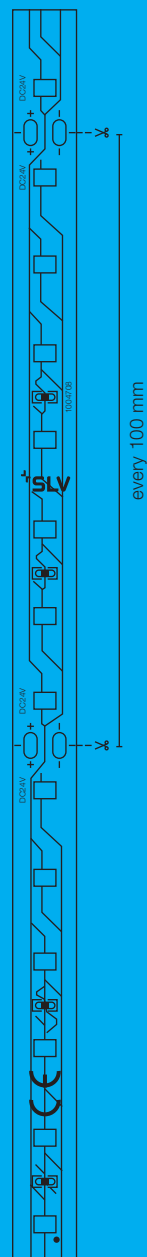



All GRAZIA LED strips are based on 24 V.  
Matching drivers and additional accessories  
can be found on pages 64–71.

### GRAZIA PRO MAX

1004720  
1004721

196 LEDs/m

### GRAZIA PRO MAX

1004722  
1004723

196 LEDs/m

### GRAZIA PRO MAX TUNABLE WHITE

1004725





224 LEDs/m

### GRAZIA PRO MAX

RGBW

1004727

70 LEDs/m

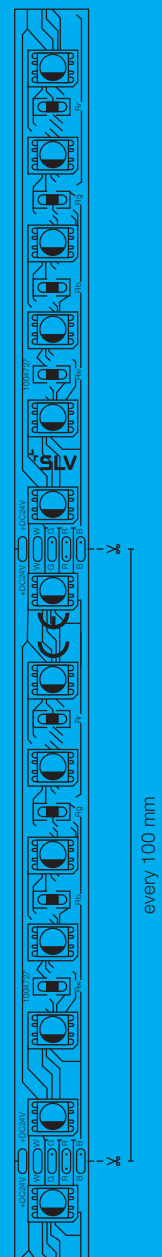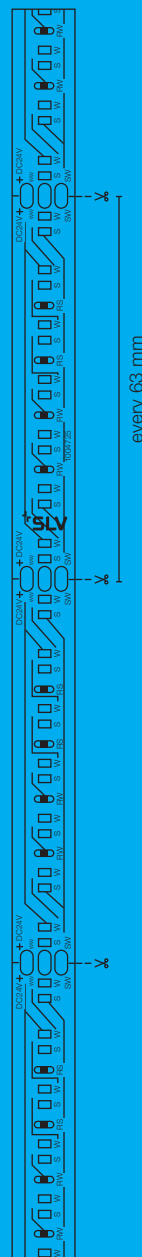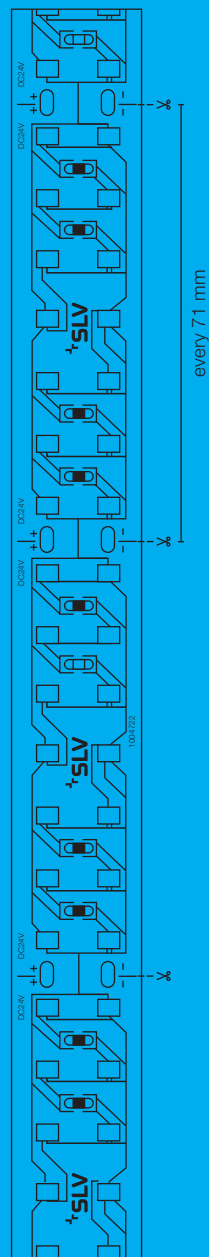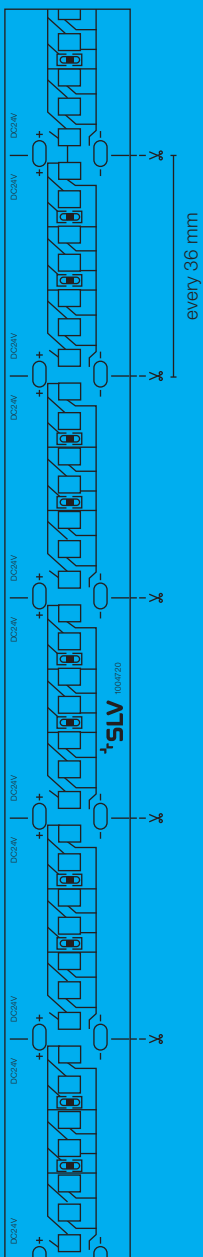

# GRAZIA 10

## FLEX STRIPS ACCESSORIES



L x W x H (mm):  
2000 x 30 x 16,2



2000 x 17,5 x 11



2000 x 19,5 x 19,5

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 10 <i>Recessed profile, LED, 2 m, black</i>	●	-	-	-	1000459	28,50
GRAZIA 10 <i>Recessed profile, LED, 2 m, white</i>	○	-	-	-	1000458	28,50

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 10 <i>Surface-mounted profile, LED, flat, grooved, 2 m, black</i>	●	-	-	-	1000462	28,50
GRAZIA 10 <i>Surface-mounted profile, LED, flat, grooved, 2 m, white</i>	○	-	-	-	1000461	28,50

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 10 EDGE <i>2 m, white</i>	○	-	-	-	1004890	27,25
GRAZIA 10 EDGE <i>2 m, aluminium</i>	●	-	-	-	1004889	27,25







L x W x H (mm):  
2000 x 15,8 x 4

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
COVER FLAT DESIGN <i>For GRAZIA 10, 2 m, frosted</i>	○	-	-	-	1000468	24,00
COVER FLAT DESIGN <i>For GRAZIA 10, 2 m, milky</i>	○	-	-	-	1000466	18,00
COVER FLAT DESIGN <i>For GRAZIA 10, 2 m, satin finish</i>	○	-	-	-	1000469	24,00



L x W x H (mm):  
30 x 16,2 x 11

17,5 x 11 x 5,5

20 x 7 x 20

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
END CAPS <i>For GRAZIA 10 recessed profile, 2 pieces, black</i>	●	-	-	-	1000474	6,85
END CAPS <i>For GRAZIA 10 recessed profile, 2 pieces, white</i>	○	-	-	-	1000473	6,85
END CAPS FLAT DESIGN <i>For GRAZIA 10 surface-mounted profile flat, 2 pieces, black</i>	●	-	-	-	1000477	6,85
END CAPS FLAT DESIGN <i>For GRAZIA 10 surface-mounted profile flat, 2 pieces, white</i>	○	-	-	-	1000476	6,85
END CAPS <i>For GRAZIA 10 EDGE, white</i>	○	-	-	-	1004894	2,60
END CAPS <i>For GRAZIA 10 EDGE, aluminium</i>	●	-	-	-	1004893	2,60



L x W x H (mm):  
15,3 x 3 x 10

22,5 x 150 x 22,5

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
MOUNTING CLIP <i>For GRAZIA 10 surface-mounted profile, invisible, 2 pieces</i>	●	-	-	-	1000487	4,30
MOUNTING CLIP <i>For GRAZIA 10 surface-mounted profile, grooved, 45°, visible, 2 pieces</i>	○	-	-	-	1000489	5,40
MOUNTING CLIP <i>For GRAZIA 10 EDGE</i>	●	-	-	-	1004895	3,80

# GRAZIA 20

## FLEX STRIPS ACCESSORIES




L x W x H (mm):

3000 x 52 x 32



3000 x 35 x 32

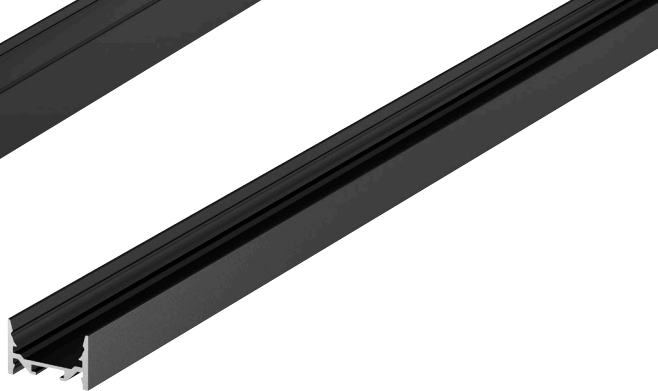

3000 x 35 x 22

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 20 <i>Recessed profile, LED, 3 m, black</i>	●	-	-	-	1000498	103,00
GRAZIA 20 <i>Recessed profile, LED, 3 m, white</i>	○	-	-	-	1000497	103,00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 20 <i>Surface mounted profile, LED, standard, smooth, 3 m, black</i>	●	-	-	-	1000525	91,00
GRAZIA 20 <i>Surface mounted profile, LED, standard, smooth, 3 m, white</i>	○	-	-	-	1000524	91,00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 20 <i>Surface mounted profile, LED, flat, smooth, 3 m, black</i>	●	-	-	-	1000534	70,00
GRAZIA 20 <i>Surface mounted profile, LED, flat, smooth, 3 m, white</i>	○	-	-	-	1000533	70,00



All accessories  
have IP20



L x W x H (mm):  
3000 x 32 x 6

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
COVER FLAT DESIGN <i>For GRAZIA 20, plastic, 3 m, frosted</i>	○	-	-	-	1000546	41,75
COVER FLAT DESIGN <i>For GRAZIA 20, plastic, 3 m, milky</i>	○	-	-	-	1000549	41,75
COVER FLAT DESIGN <i>For GRAZIA 20, plastic, 3 m, satin finish</i>	○	-	-	-	1000540	30,00



L x W x H (mm):  
52 x 32 x 16

35 x 22 x 10

35 x 32 x 10

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
END CAPS <i>For GRAZIA 20 recessed profile, 2 pieces, black</i>	●	-	-	-	1000558	9,60
END CAPS <i>For GRAZIA 20 recessed profile, 2 pieces, white</i>	○	-	-	-	1000557	9,60
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, black</i>	●	-	-	-	1000561	9,60
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, white</i>	○	-	-	-	1000560	9,60
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, black</i>	●	-	-	-	1000567	9,60
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, white</i>	○	-	-	-	1000566	9,60



L x W x H (mm):  
30 x 8 x 20

55 x 70 x 23

38 x 14 x 4

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
MOUNTING SPRING <i>For GRAZIA 20, chrome / aluminium, 2 pieces</i>	●	-	-	-	1004932	20,75
LONGITUDINAL CONNECTOR <i>For GRAZIA 20, 2 pieces</i>	●	-	-	-	1000571	12,60
PENDANT SUSPENSION <i>FOR GRAZIA 20 surface-mounted profile, 2 m, LED, 2 pieces</i>	○	-	-	-	1000535	28,50
MOUNTING CLIP <i>FOR GRAZIA 20 surface-mounted profile, LED, invisible, 2 pieces</i>	○	-	-	-	1000536	4,30

# GRAZIA 60

## FLEX STRIPS ACCESSORIES



L x W x H (mm):

1500/3000 x 86 x 33

1500 x 61 x 12

1500/3000 x 70 x 95

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 60 <i>Profile recessed, 1.5 m, black</i>	●	-	-	-	1004905	68,00
GRAZIA 60 <i>Profile recessed, 1.5 m, white</i>	○	-	-	-	1004906	68,00
GRAZIA 60 <i>Profile recessed, 3 m, black</i>	●	-	-	-	1004907	135,00
GRAZIA 60 <i>Profile recessed, 3 m, white</i>	○	-	-	-	1004908	135,00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
GRAZIA 60 <i>Profile surface-mounted, 1.5 m, black</i>	●	-	-	-	1004902	39,75
GRAZIA 60 <i>1.5 m, black</i>	●	-	-	-	1004896	107,00
GRAZIA 60 <i>1.5 m, white</i>	○	-	-	-	1004897	107,00
GRAZIA 60 <i>3 m, black</i>	●	-	-	-	1004898	215,00
GRAZIA 60 <i>3 m, white</i>	○	-	-	-	1004899	215,00

L x W x H (mm):

80 x 42 x 24



Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
FEED-IN SET <i>For GRAZIA 60</i>	●	-	-	-	1004904	11,70



L x W x H (mm):  
1500 x 65 x 6,5

3000 x 65 x 6,5

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
COVER For GRAZIA 60, 1.5 m, black	●	-	-	-	1004912	33,00
COVER For GRAZIA 60, 1.5 m, white	○	-	-	-	1004913	33,00
PC COVER For GRAZIA 60, 1.5 m, frosted	○	-	-	-	1004914	16,70
PMMA COVER For GRAZIA 60, 1.5 m, frosted	○	-	-	-	1004916	21,25
PC COVER For GRAZIA 60, 3 m, frosted	○	-	-	-	1004915	33,00
PMMA COVER For GRAZIA 60, 3 m, frosted	○	-	-	-	1004917	41,75



L x W x H (mm):  
86 x 33 x 25

70 x 95 x 20

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
END CAPS For GRAZIA 60 recessed, black	●	-	-	-	1004909	6,85
END CAPS For GRAZIA 60 recessed, white	○	-	-	-	1004910	6,85
END CAPS For GRAZIA 60 recessed, black	●	-	-	-	1004900	10,10
END CAPS For GRAZIA 60, white	○	-	-	-	1004901	10,10



L x W x H (mm):  
130 x 28 x 40

80 x 42 x 10

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
MOUNTING CLIPS For GRAZIA 60 recessed	●	-	-	-	1004911	14,20
LONGITUDINAL CONNECTOR For GRAZIA 60	●	-	-	-	1004903	10,10

# UNIVERSAL DEVICES

## OPERATING DEVICES & CONTROLLERS



L x W x H (mm):  
145 x 46,5 x 16



115 x 41 x 25



300 x 30 x 16



ø x H (mm):  
55 x 25



55 x 22

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
CONTROLLER CCT, RGBW, 12-24 V, ZigBee 3.0	○	12 V	⚡	-	1006348	80,00
LED POWER SUPPLY 20 W, 12 / 24 V	○	220-240 V	□	-	1005381	39,50
LED POWER SUPPLY 30 W, 24 V, weiß	○	220-240 V	□	-	1007250	50,00
LED POWER SUPPLY 15 W, 12 V	○	200-240 V	□	-	1005444	28,50
LED POWER SUPPLY 15 W, 24 V	○	200-240 V	□	-	1005445	28,50



L x W x H (mm):  
128 x 52 x 30



184 x 61 x 32



210 x 67 x 34



116 x 42 x 18



202 x 58 x 30



347 x 40 x 22

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
LED POWER SUPPLY 25 W, 24 V, white, dimmable	○	220-240 V	□	Ⓢ	1006336	35,00
LED POWER SUPPLY 50 W, 24 V, TRIAC dimmable	○	220-240 V	□	Ⓢ	1003104	49,50
LED POWER SUPPLY 100 W, 24 V, TRIAC dimmable	○	220-240 V	□	Ⓢ	1003105	121,00
DALI PUSH-DIM CONTROL 24 V	○	10 V	□	Ⓢ	1003106	64,00
LED POWER SUPPLY 60 W, DALI, 24 V, 2 channel Tunable White	○	220-240 V	□	Ⓢ	1006133	153,00
LED POWER SUPPLY 100 W, DALI, 24 V, 2 channel Tunable	○	220-240 V	□	Ⓢ	1006134	184,00



L x W x H (mm):

300 x 30 x 16

350 x 30 x 18





350 x 30 x 18

350 x 30 x 18

350 x 30 x 18

400 x 40 x 22

400 x 40 x 22


Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	EUR
LED POWER SUPPLY 30 W, 24 V, white, DALI	○	220-240 V	□		1007254	60,00
LED POWER SUPPLY 100 W, 24 V, white, DALI	○	200-240 V	□		1007255	110,00
LED POWER SUPPLY 100 W, 24 V, white	○	200-240 V	□	-	1007251	80,00
LED POWER SUPPLY 150 W, 24 V, white, DALI	○	220-240 V	□		1007256	140,00
LED POWER SUPPLY 150 W, 24 V, white	○	220-240 V	□	-	1007252	100,00
LED POWER SUPPLY 250 W, 24 V, white, DALI	○	220-240 V	□		1007257	160,00
LED POWER SUPPLY 250 W, 24 V, white	○	220-240 V	□	-	1007253	120,00



# COLOUR EXPLANATION




Anthracite



Black



Grey



White



Chrome



Silver




Aluminium



Gold



# EXPLANATION OF SYMBOLS



Dimmable with:

- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **DALI** = DALI bus system



Protection classes:

- Protection class I / protective conductor
- Protection class II / protection by double or reinforced insulation



Half-diffusion angle:

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Pivoting capacity in degrees:



Through-wiring possible



Service life



A large part of the products shown in this brochure are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this brochure are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.

All products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This brochure contains a general range and is not country specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

SLV GmbH | Daimlerstraße 21-23, 52531 Uebach-Palenberg, Germany, +49 (0) 2451 4833 - 333, info@slv.de  
SLV Austria | +49 (2451) 4833 355, export@slv.de  
SLV Belgium | Herentalsebaan 429, B-2160 Wommelgem, +32 (0) 3/385 30 08, info@slv.be  
SLV Nordics | Flade Engvej 4, 9900 Frederikshavn, Denmark, +45 9310 7474, info@nordics.slv.com  
SLV France | Zac du Martelet, 88, rue Henri Dépaigneux, F-69400 Limas, +33 4 74 02 71 20, infofr@slv.com  
SLV LIGHTING UK LTD | Unit E Chiltern Park, Boscombe Road, Dunstable, LU5 5LT, +44 (0)203 968 11 00, sales@uk.slv.com  
SLV Italia S.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LC), +39 039 5983575, infoit@slv.com  
SLV Nederland | Kazernestraat 19, 5928 NL Venlo, +31 773204343, info@slv.nl  
SLV i Norge, del av SLV Nordics | Tors veg 9B, 7035 Trondheim, +47 4777 1080, post-no@slv.com  
SLV Poland | +48 (22) 7224975, slv@slv.pl  
SLV Portugal | R. Margarida de Abreu, no13 – Lj2, 1900-314 Lisboa, +351 210 185 961, info@pt.slv.com  
SLV Swiss SA | Route du Bey 6 Box 1-4, Z.I. La Jonnaire, CH-1847 Rennaz, +41 218113232, info@slv-swiss.ch  
SLV d.o.o | Barjanska cesta 50, SI-1000 Ljubljana, +386 1 2009 730, info@slv.si  
SLV Spain | Antic Camí Ral Valencia, 38, L17, 08860 Castelldefels, Barcelona, 931 168 161, info@slv.es  
SLV Czech s.r.o. | V Sedlci 28/17, CZ-160 00 Praha 6, +420 739 282 151, info@cz.slv.com