

PMD 5050S



Diesel and soundproof motorization stand for reliability with low operating cost in the maximum comfort. Handle and wheels allow easy move and transportation. Generous fuel tank capacity allows for long continuous running time. Built-in digital multimeter for scheduled maintenance intervals and ensure optimal operating condition. Automatic Voltage Regulator (AVR) allows for tension stability.

FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point



Principales Características

Frecuencia	Hz	50
Voltaje	V	400/230
Fase		3
Potencia Máxima	Watts	3700
Potencia nominal	Watts	3360

Potencia Monofasica

Voltaje	V	230
Potencia Máxima Monofásica	Watts	2700
Potencia nominal monofásica	Watts	2520



Motor

Marca		Powermate
Tipo		OHV
Velocidad de funcionamiento nominal	rpm	3000
Combustible		Diesel
Sistema de arranque		Eléctrico
Deposito de aceite	l	1.65
Sistema de protección por bajo nivel de aceite		√




Alternador

Regulación Voltaje		AVR
--------------------	--	-----


Dimensiones

Longitud	(L) mm	910
Ancho	(W) mm	518
Altura	(H) mm	682
Peso seco	Kg	185
Dimensión de caja de cartón LxWxH	mm	950x570x765

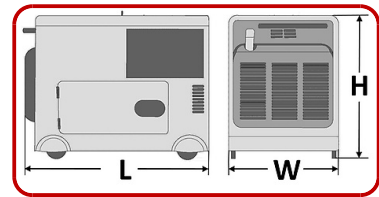

Autonomía

Capacidad de tanque de combustible		14.5
Consumición de combustible @ 75%	l/h	1.3
Autonomía al @ 75%	h	11

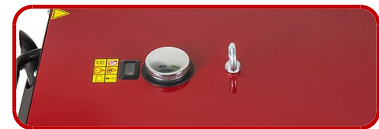

Nivel sonoro

Nivel sonoro garantizado (LWA)	dBA	97
Nivel de presión de ruido @ 7 mt	dB(A)	69

CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS:

- Start selector switch with key: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

OUTPUT:

- Battery Charger 12V DC



ENCHUFES

SCHUKO 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1

The information is aligned with the Data file at the time of download. Printed on 09/11/2017 (ID 6432)

©2017 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice