


# Florida Filter - Private & Semi Commercial Pools

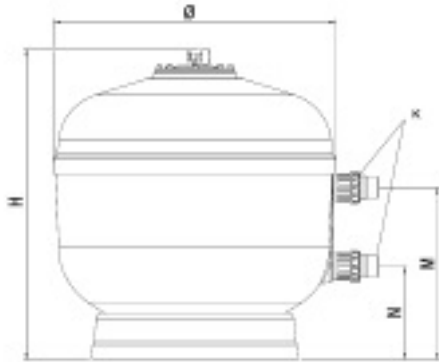

## Florida Filter

- Reinforced Polyester Resin and Glass Fibre Sand Filter.
- Fitted with Pressure Gauge, Manual Water Drain, Manual Air Vent
- Maximum Working Pressure 2.5 Bar (Test Pressure 3 Bar)
- Filtration Velocity 50m<sup>3</sup>/h/m<sup>2</sup>

## Florida Laminated Filter + Multiport Valve

Code	Description
<b>ZZFFRS0400</b>	Florida filter 6m <sup>3</sup> /h 400Ø + 1.5" multiport valve
<b>ZZFFRS0500</b>	Florida filter 9m <sup>3</sup> /h 500Ø + 1.5" multiport valve
<b>ZZFFRS0600</b>	Florida filter 14m <sup>3</sup> /h 600Ø + 1.5" multiport valve
<b>ZZFFRS0750</b>	Florida filter 21m <sup>3</sup> /h 750Ø + 2" multiport valve
<b>ZZFFRS0900</b>	Florida filter 32m <sup>3</sup> /h 900Ø + 2" multiport valve

## Florida Laminated Filter - Tank Only (No Valve) 0.6m Bed Depth

Code	Description
<b>FFRS01050-1</b>	Florida filter 43m <sup>3</sup> /h 1050Ø 75mm conns 2.5" drain port 400mm top manhole
<b>FFRS01200-1</b>	Florida filter 56m <sup>3</sup> /h 1200Ø 90mm conns 2.5" drain port 400mm top manhole

Code	FFRS0400	FFRS0500	FFRS0600	FFRS0750	FFRS0900	FFRS1050-1	FFRS1200-1
<b>Ø mm</b>	400	500	600	750	900	1050	1200
<b>Flow (m<sup>3</sup>/h)</b>	6	9	14	21	32	43	56
<b>Sand (kg)</b>	50	95	170	295	505	670	900
<b>H (mm)</b>	680	730	840	983	1115	1285	1362
<b>M (mm)</b>	380	380	455	535	615	650	660
<b>N (mm)</b>	255	255	330	305	385	380	390
<b>K (conns)</b>	1.5"	1.5"	1.5"	2"	2"	75mm	90mm