A Broad Range of Offers for Diverse Customer Values

LG's versatile standard displays are optimized for a variety of markets.

High Performance

The quad core SoC (System-on-Chip) executes several tasks at once and provides smooth content playback without a media player.
The webOS platform supports convenient tools to manage the signage.

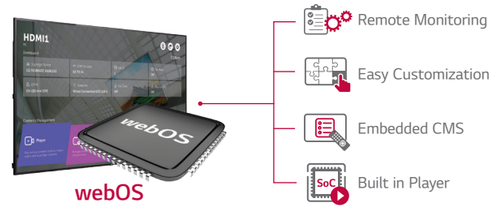

Enhanced Connectivity

Through its diverse interface, the signage lets you connect more than one device for optimal use.



USB Content Scheduling

There is no need for additional server or media player connections because LG standard signage support USB playback and scheduling. Users can set a playlist and timing for playing content using a USB.

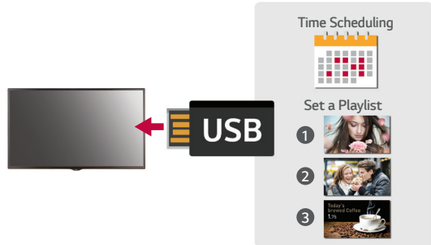

Multi Screen with PBP / PIP

PBP (Picture-By-Picture) and PIP (Picture-In-Picture) features enable you to compose various layouts for several digital devices.



PBP

PIP

Line-up

700 nit Standard

55"/49"/43" (SH7E)

webOS

- Full HD: 1,920 x 1,080
- Brightness: 700 cd/m^2
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
- Built-in speaker
- Double screen with 2PBP[1] / PIP[2]

450 nit Standard

65" (SM5KD/SM5D)
55"/49"/43"/32" (SM5KE/SM5D)

webOS

- Full HD: 1,920 x 1,080
- Brightness: 450 cd/m^2, 400 cd/m^2 (32")
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
  13 mm (T/L/R), 18 mm (B) (32")
- Double screen with 2PBP / PIP
- Built-in speaker (SM5KE/SM5KD Only)

700 nit Standard

55"/49"/42" (LS75C-M/LS73D)

webOS

- Full HD: 1,920 x 1,080
- Brightness: 700 cd/m^2 (LS75C-M), 500cd/m^2 (LS73D)
- Haze: 10%
- Bezel: 7.4 mm (Even)
- Double screen with 2PBP / PIP

250 nit Standard

22" (22SM3B)

webOS

- Full HD: 1,920 x 1,080
- Brightness: 250 cd/m^2
- Bezel: 16.3 mm (Even)
- Built-in speaker

LG Smart Signage Platform webOS

webOS is a LG's smart signage platform that allows easy integration and expansion to various solutions and value-added services.

For more detailed information, move to page 83

1) Picture-By-Picture
2) Picture-In-Picture
※ The model line-up is subject to change without notice and may differ depending on the region.

Standard

※ Specifications are subject to change without notice

			SH7E	LS75C-M	LS73D
Panel	Screen Size		55", 49", 43"	55", 49", 42"	55", 49", 42"
	Panel Technology		IPS	IPS	IPS
	Aspect Ratio		16 : 9	16 : 9	16 : 9
	Native Resolution		1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness		700 cd/m²	700 cd/m²	500 cd/m²
	Viewing Angle (H x V)		178 x 178	178 x 178	178 x 178
	Surface Treatment		AGP Haze 3%	Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 10%)	Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 10%)
	Operation Hours		24Hrs	24Hrs	24Hrs
	Orientation		Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
Connectivity	Input		HDMI (3), DP, DVI-D, Audio, USB 3.0	HDMI (2), DP, DVI-D, Audio In, OPS, USB 3.0	HDMI (2), DP, DVI-D, Audio, USB 3.0
	Output		DP, Audio (Off/Fixed/Variable)	DP, Audio, External Speaker	DP, Audio, Externel Speaker
	External Control		RS232C In/out, RJ45 In, IR In	RS232C In/out, RJ45 In, IR/Light Sensor In	RS232C In/out, RJ45 In, IR/Light Sensor In
Physical Specification	Bezel Color		Black	Black	Black
	Bezel Width		11.9 mm (T/L/R), 18 mm (B)	7.4 mm (Even)	7.4 mm (Even)
	Monitor Dimension (W x H x D)		55": 1,238 x 714.9 x 54 mm, 49": 1,102.2 x 638.5 x 54 mm, 43": 969.6 x 563.9 x 54 mm	55": 1,230 x 714 x 32 mm, 49": 1,095 x 637 x 32 mm, 42": 949 x 555 x 32 mm	55": 1,230 x 714 x 32 mm, 49": 1,095 x 637 x 32 mm, 42": 949 x 555 x 32 mm
	Weight (Head)		55': 17.5 kg, 49": 14.3 kg, 43": 10.5 kg	55": 20.7 kg, 49": 15.6 kg, 42": 12.5 kg	55": 20.7 kg, 49": 15.6 kg, 42": 12.5 kg
	Carton Dimensions (W x H x D)		55": 1,330 x 807 x 170 mm, 49": 1,197 x 760 x 166 mm, 43": 1,052 x 650 x 123 mm	55": 1,330 x 815 x 174 mm, 49": 1,197 x 760 x 134 mm, 42": 1,045 x 645 x 127 mm	55": 1,330 x 815 x 174 mm, 49": 1,197 x 760 x 134 mm, 42": 1,045 x 645 x 127 mm
	Packed Weight		55": 21.7 kg, 49": 17.4 kg, 43": 12.6 kg	55": 25.2 kg, 49": 18.7 kg, 42": 14.8 kg	55": 25.2 kg, 49": 18.7 kg, 42": 14.8 kg
	VESA™ Standard Mount Interface		55"/49": 300 × 300 mm 43" : 200 × 200 mm	400 × 400 mm	400 x 400 mm
Environment Conditions	Operation Temperature		0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity		10% to 80%	10% to 80%	10% to 80%
Power	Power Supply		100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type		Built-In Power	Built-In Power	Built-In Power
	Power Consumption	Typ.	130 W (55") / 110 W (49") / 95 W (43")	140 W (55") / 125 W (49") / 110 W (42")	120 W (55") / 105 W (49") / 80 W (42")
		Smart Energy Saving	91 W (55") / 77 W (49") / 66.5 W (43")	100 W (55") / 90 W (49") / 80 W (42")	85 W (55") / 75 W (49") / 60 W (42")
Standard (Certification)	Safety		IEC 60950-1 / EN 60950-1 / UL 60950-1	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC		FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star		N/A / Yes (Energy Star 7.0)	N/A / No	N/A / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible		Yes	Yes	Yes
	External Media Player Attachable		Yes	Yes	Yes
Software Compatibility*	Content Management Software		SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software		SuperSign Control+/Control	SuperSign Control+/Control	SuperSign Control
Accessories	Basic		Remote Controller (2ea Batteries Included), Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender, Memory Cover	Remote Controller (2ea Batteries Included), Power Cord, IR/Light Sensor Receiver, QSG, Regulation Book, HDMI Cable	Remote Controller (2ea Batteries Included), Power Cord, IR/Light Sensor Receiver, QSG, Regulation Book, HDMI Cable
	Optional		Stand (55"/49": ST-492T, 43": ST-432T), Media Player, Wall Bracket (55"/49": LSW350B, 43": LSW230B), VESA Adapter (55"/49": AM-B330S, 43": AM-B220S), OPS Kit (KT-OPSA), Touch Overlay	External Speaker (SP-2100), Stand (ST-200T), Wall Bracket (LSW440S), AN-WF500 (Wi-Fi USB Dongle), OPS Kit (KT-OPSA)	External Speaker (SP-2100), Stand (ST-200T), Wall Bracket (LSW440S), Wi-Fi USB Dongle (AN-WF500), OPS Kit (KT-OPSA)

			65SM5KD, SM5KE/SM5D	SM3B
Panel	Screen Size		65" (SM5KD/SM5D Only), 55", 49", 43", 32"	22"
	Panel Technology		IPS	IPS
	Aspect Ratio		16 : 9	16 : 9
	Native Resolution		1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness		450 cd/m² (32": 400 cd/m²)	250 cd/m²
	Viewing Angle (H x V)		178 x 178	178 x 178
	Surface Treatment		AGP Haze 1%	Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 1%, Typ.)
	Operation Hours		24Hrs	16Hrs
	Orientation		Landscape & Portrait	Landscape
Connectivity	Input		HDMI (3), DP, DVI-D, Audio, USB 3.0	HDMI, RGB, Audio, USB 3.0
	Output		DP, Audio (Off/Fixed/Variable), External Speaker (SM5D Only)	-
	External Control		RS232C In/out, RJ45 In, IR Receiver In	RS232C In, RJ45 In, IR Receiver In (Built-in Type), Pixel Sensor In
Physical Specification	Bezel Color		Black	Black
	Bezel Width		11.9 mm (T/L/R), 18 mm (B) 13 mm (T/R/L), 18 mm (B) (32")	16.3 mm (Even)
	Monitor Dimension (W x H x D)		65": 1,456.9 x 838 x 56.5 (SM5D 41.1) mm 55": 1,238 x 714.9 x 54 (SM5D 38.6) mm 49": 1,102.2 x 638.5 x 54 (SM5D 38.6) mm 43": 969.6 x 563.9 x 54 (SM5D 38.6) mm 32": 729.4 x 428.9 x 55.5 mm	510.3 x 302.1 x 53.8 mm
	Weight (Head)		65": 27.9 (SM5D 27.7) kg 55": 17.5 (SM5D 17.3) kg 49": 14.3 (SM5D 14.1) kg 43": 10.0 (SM5D 9.8) kg 32": 5.4 (SM5D 5.2) kg	3.6 kg
	Carton Dimensions (W x H x D)		65": 1,561 x 977 x 190 mm 55": 1,330 x 807 x 170 mm 49": 1,197 x 760 x 166 mm 43": 1,052 x 650 x 123 mm 32": 810 x 510 x 132 mm	565 x 357 x 103 mm
	Packed Weight		65": 33.8 (SM5D 33.6) kg 55": 21.7 (SM5D 21.5) kg 49": 17.4 (SM5D 17.2) kg 43": 12.6 (SM5D 12.4) kg 32": 6.7 (SM5D 6.5) kg	4.7 kg
	VESA™ Standard Mount Interface		65"/55"/49": 300 × 300 mm 43"/32": 200 × 200 mm	100 x 100 mm
Environment Conditions	Operation Temperature		0°C to 40°C	0°C to 40°C
	Operation Humidity		10% to 80%	10% to 80%
Power	Power Supply		100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type		Built-In Power	Built-In Power
	Power Consumption	Typ.	120 W (65") / 100 W (55") / 85 W (49") / 75 W (43") / 60 W (32")	35 W
		Smart Energy Saving	85 W (65") / 70 W (55") / 59.5 W (49") / 52.5 W (43") / 42 W (32")	25.13 W (On) / 29.76 W (Off)
Standard (Certification)	Safety		IEC 60950-1 / EN 60950-1 / UL 60950-1	UL / cUL / CB / TUV
	EMC		FCC Class "A" / CE / KC	FCC Class "A" / CE
	ErP / Energy Star		N/A / Yes (Energy Star 7.0)	N/A / No
Media Player Compatibility	OPS Type Compatible		Yes	No
	External Media Player Attachable		Yes	No
Software Compatibility*	Content Management Software		SuperSign CMS	SuperSign CMS
	Control and Monitoring Software		SuperSign Control+/Control	SuperSign Control
Accessories	Basic		Remote Controller (2ea Batteries Included), Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender, Memory Cover	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Phone to RS232C Gender
	Optional		Stand (55"/49": ST-492T, 43": ST-432T, 32": ST-322T), Media Player, Wall Bracket (55"/49": LSW350B, 43"/32": LSW230B), VESA Adapter (55"/49": AM-B330S, 43"/32": AM-B220S), OPS Kit (KT-OPSA), Touch Overlay, Speaker (SP-5000, SM5D Only)	-

* Software compatibility may change over time. Please contact your regional LG sales representative for details.

Line-up

700 nit OPS Power Built-in

55"/49"/43" (SH7PE-H/SH7PE-B)

- Full HD: 1,920 x 1,080
- Brightness: 700 cd/m²
- Haze: 28% (-H), 3% (-B)
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
- Built-in speaker

700 nit Standard

55"/49"/43" (SH7DD)

- Full HD: 1,920 x 1,080
- Brightness: 700 cd/m²
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
- Built-in speaker

450 nit High Haze

55"/49"/43" (SL5PE-H/SL5E-H*)

- Full HD: 1,920 x 1,080
- Brightness: 450 cd/m² (Max.)
- Haze: 28%
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
- Built-in Speaker, Built-in OPS Power (SL5PE-H Only)

* It will be released in the 4th quarter of 2018.

450 nit Standard

32" (SL5B)

- Full HD: 1,920 x 1,080
- Brightness: 450 cd/m²
- Bezel: 18.9 mm (T/L/R), 26 mm (B)

350 nit Standard

65" (SE3KD/SE3D)
55"/49"/43"/32" (SE3KE/SE3D)

- Full HD: 1,920 x 1,080
- Brightness: 350 cd/m²
- Bezel: 11.9 mm (T/L/R), 18 mm (B),
  13.0 mm (T/L/R), 18 mm (B) (32")
- Built-in speaker (SE3KE/SE3KD Only)

300 nit Standard

55"/49"/43" (SE3DD)

- Full HD: 1,920 x 1,080
- Brightness: 300 cd/m²
- Bezel: 11.9 mm (T/L/R), 18 mm (B)

Small Touch Display

23" (SE3TE)

- Full HD: 1,920 x 1,080 (23")
- Brightness: 250 cd/m² (23")
- Built-in touch

※ The model line-up is subject to change without notice and may differ depending on the region.

Standard

※ Specifications are subject to change without notice

		SH7PE-H/SH7PE-B	SH7DD
Panel	Screen Size	55", 49", 43"	55", 49", 43"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	SH7PE-H: 700 cd/m² (Max.) SH7PE-B: 700 cd/m² (Typ.)	700 cd/m²
	Viewing Angle (H x V)	178 x 178	178 x 178
	Surface Treatment	SH7PE-H: Haze 28% SH7PE-B: Haze 3%	Haze 3% (Typ.)
	Operation Hours	24Hrs	24Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	HDMI (2), DVI-D, Audio, RGB, USB	HDMI (2), DVI-D, RGB, Audio, USB
	Output	Audio (Off/Fixed/Variable)	Audio (Off/Fixed/Variable)
	External Control	RS232C In/out, RJ45 In, IR In	RS232C In/out, RJ45 In, IR Receiver In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	11.9 mm (T/L/R), 18 mm (B)	11.9 mm (T/L/R), 18 mm (B)
	Monitor Dimension (W x H x D)	55": 1,238 x 714.9 x 54 mm, 49": 1,102.2 x 638.5 x 54 mm, 43": 969.6 x 563.9 x 54 mm	55": 1,238 x 714.9 x 54 mm, 49": 1,102.2 x 638.5 x 54 mm, 43": 969.6 x 563.9 x 54 mm
	Weight (Head)	55" : 17.5 kg 49" : 14.3 kg 43" : 10.5 kg	55": 17.3 kg, 49": 14.1 kg, 43": 9.8 kg
	Carton Dimensions (W x H x D)	55": 1,330 x 807 x 170 mm, 49": 1,197 x 760 x 166 mm, 43": 1,052 x 650 x 123 mm	55": 1,330 x 807 x 170 mm, 49": 1,197 x 760 x 166 mm, 43": 1,052 x 650 x 123 mm
	Packed Weight	55" : 21.7 kg 49" : 17.4 kg 43" : 12.6 kg	55": 21.5 kg, 49": 17.2 kg, 43": 12.4 kg
	VESA™ Standard Mount Interface	55"/49": 300 × 300 mm 43" : 200 × 200 mm	55"/49": 300 × 300 mm 43": 200 × 200 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption – Typ.	100 W (55") / 90 W (49") / 75 W (43")	95 W (55") / 85 W (49") / 75 W (43")
	Power Consumption – Smart Energy Saving	70 W (55") / 63 W (49") / 52.5 W (43")	75 W (55") / 65 W (49") / 55 W (43")
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	UL / cUL / CB / TUV / KC
	EMC	FCC Class "B" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)	Yes[1] / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible	Yes	No
	External Media Player Attachable	Yes	Yes
Software Compatibility*	Content Management Software	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control+/Control	SuperSign Control
Accessories	Basic	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver
	Optional	Stand (55"/49": ST-492T, 43": ST-432T), Media Player, Wall Bracket (55"/49": LSW350B, 43": LSW230B), VESA Adapter (55"/49": AM-B330S, 43": AM-B220S), OPS Kit (KT-OPSD), Wi-Fi Dongle (AN-WF500), Touch Overlay	Stand (55"/49": ST-492T, 43": ST-432T), Media Player, Wall Mount Bracket (55"/49": LSW350B, 43": LSW230B), VESA Adapter (55"/49": AM-B330S, 43": AM-B220S), Wi-Fi Dongle (AN-WF500), Touch Overlay

		SL5PE-H/SL5E-H	SL5B
Panel	Screen Size	55", 49", 43"	32"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	450 cd/m² (Max.)	450 cd/m²
	Viewing Angle (H x V)	178 x 178	178 x 178
	Surface Treatment	Haze 28%	Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 1%, Typ.)
	Operation Hours	24Hrs	24Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	HDMI (2), DVI-D, RGB, Audio, USB	HDMI, DVI-D, RGB, Audio, USB (2)
	Output	Audio (Off/Fixed/Variable)	Audio, External Speaker
	External Control	RS232C In/out, RJ45 In, IR Receiver In	RS232C In/out, RJ45 In, IR Receiver In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	55"/49"/43": 11.9 mm (T/R/L), 18 mm (B)	18.9 mm (T/L/R), 26 mm (B)
	Monitor Dimension (W x H x D)	55": 1,238 x 714.9 x 54 mm, 49": 1,102.2 x 638.5 x 54 mm, 43": 969.6 x 563.9 x 54 mm	740.4 × 442.0 × 35.6 mm
	Weight (Head)	55": 17.5 kg 49": 14.3 kg 43": 10.0 kg	8.0 kg
	Carton Dimensions (W x H x D)	55": 1,330 x 807 x 170 mm, 49": 1,197 x 760 x 166 mm, 43": 1,052 x 650 x 123 mm	850 × 585 ×121 mm
	Packed Weight	55": 21.7 kg 49": 17.4 kg 43": 12.6 kg	9.9 kg
	VESA™ Standard Mount Interface	55"/49": 300 x 300 mm 43": 200 x 200 mm	200 x 200 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-in Power	Built-in Power
	Power Consumption – Typ.	SL5PE-H: 90W(55")/80W(49")/70W(43") SL5E-H: 95W(55")/85W(49")/75W(43")	65 W
	Power Consumption – Smart Energy Saving	SL5PE-H: 63W(55")/56W(49")/49W(43") SL5E-H: 75W(55")/65W(49")/55W(43")	42 W
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	UL / cUL / CB / TUV / KC
	EMC	FCC Class "B" (SL5E-H "A") / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes[1] / Yes (Energy Star 7.0)	N/A / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	Yes	Yes
Software Compatibility*	Content Management Software	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+	SuperSign Control
Accessories	Basic	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver
	Optional	Stand (55"/49": ST-492T, 43": ST-432T), Media Player, Wall Bracket (55"/49": LSW350B, 43": LSW230B), VESA Adapter (55"/49": AM-B330S, 43": AM-B220S), OPS Kit (KT-OPSD), Wi-Fi Dongle (AN-WF500), Touch Overlay	Speaker (SP-2100), Stand (ST-320T), Media Player, Wall Bracket (LSW200B), OPS Kit (KT-OPSA)

1) EU ErP: N/A
* Software compatibility may change over time. Please contact your regional LG sales representative for details.

Standard

※ Specifications are subject to change without notice

			65SE3KD,SE3KE/SE3D
Panel	Screen Size		65"(SE3KD, SE3D Only), 55", 49", 43", 32"
	Panel Technology		IPS
	Aspect Ratio		16 : 9
	Native Resolution		1,920 x 1,080 (FHD)
	Brightness		350 cd/m²
	Viewing Angle (H x V)		178 x 178
	Surface Treatment		AGP Haze 1%
	Operation Hours		18Hrs
	Orientation		Landscape & Portrait
Connectivity	Input		HDMI (2), DVI-D, RGB, Audio in, USB 2.0
	Output		Audio (Off/Fixed/Variable), External Speaker (SE3D Only)
	External Control		RS232C In/out, RJ45 In, IR Receiver In
Physical Specification	Bezel Color		Black
	Bezel Width		11.9 mm (T/L/R), 18 mm (B), 32": 13 mm (T/L/R), 18 mm (B)
	Monitor Dimension (W x H x D)		65": 1,456.9 x 838 x 41.1 (SE3D 56.5) mm 55": 1,238 x 714.9 x 54 (SE3D 38.6) mm, 49": 1,102.2 x 638.5 x 54 (SE3D 38.6) mm, 43": 969.6 x 563.9 x 54 (SE3D 38.6) mm, 32": 729.4 x 428.9 x 55.5 mm
	Weight (Head)		65": 27.7 (SE3D 27.9) kg 55" : 17.5 (SE3D 17.3) kg, 49" : 14.3 (SE3D 14.1) kg, 43" : 10.0 (SE3D 9.8) kg 32" : 5.4 (SE3D 5.2) kg
	Carton Dimensions (W x H x D)		65": 1,561 x 977 x 190 mm 55": 1,330 x 807 x 170 mm, 49": 1,197 x 760 x 166 mm, 43": 1,052 x 650 x 123 mm, 32": 810 x 510 x 132 mm
	Packed Weight		65": 33.8 (SE3D 33.6) kg 55" : 21.7 (SE3D 21.5) kg, 49" : 17.4 (SE3D 17.2) kg, 43" : 12.6 (SE3D 12.4) kg, 32" : 6.7 (SE3D 6.5) kg
	VESA™ Standard Mount Interface		65"/55"/49": 300 x 300 mm 43"/32": 200 x 200 mm
Environment Conditions	Operation Temperature		0°C to 40°C
	Operation Humidity		10% to 80%
Power	Power Supply		100-240V~, 50/60Hz
	Power Type		Built-In Power
	Power Consumption	Typ.	95 W (65") / 65 W (55") / 60 W (49") / 55 W (43") / 45 W (32")
		Smart Energy Saving	70 W (65") / 45.5 W (55") / 42 W (49") / 38.5 W (43") / 31.5 W (32")
Standard (Certification)	Safety		IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC		FCC Class "A" / CE / KC
	ErP / Energy Star		Yes[1] / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible		Yes
	External Media Player Attachable		Yes
Software Compatibility*	Content Management Software		SuperSign CMS
	Control and Monitoring Software		SuperSign Control+/Control
Accessories	Basic		Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver
	Optional		Stand (55"/49" : ST-492T, 43" : ST-432T, 32" : ST-322T), Media Player, Wall Bracket (55"/49" : LSW350B, 43"/32" : LSW230B), VESA Adapter (55"/49" : AM-B330S, 43"/32": AM-B220S), Touch Overlay, Wi-Fi Dongle (AN-WF500), Speaker (SP-5000, SE3D Only)

			SE3DD	23SE3TE
Panel	Screen Size		55", 49", 43"	23"
	Panel Technology		IPS	IPS
	Aspect Ratio		16 : 9	16 : 9
	Native Resolution		1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness		300 cd/m²	250 cd/m²
	Viewing Angle (H x V)		178 x 178	178 x 178
	Surface Treatment		AGP Haze 1%	Hard Coating (3H), Anti-glare
	Operation Hours		16Hrs	16Hrs
	Orientation		Landscape & Portrait	Landscape & Portrait
Connectivity	Input		HDMI (2), RGB, Audio, USB	HDMI, RGB, USB (for Touch)
	Output		External Speaker	Headphone Out
	External Control		RS232C In/out, RJ45 In, IR Receiver In	-
Physical Specification	Bezel Color		Black	Black
	Bezel Width		11.9 mm (T/L/R), 18 mm (B)	2.3 mm (T/R/L/B)
	Monitor Dimension (W x H x D)		55": 1,238 x 714.9 x 38.6 mm, 49": 1,102.2 x 638.5 x 38.6 mm, 43": 969.6 x 563.9 x 38.6 mm	555 x 53 x 338 mm
	Weight (Head)		55": 17.1 kg, 49": 13.9 kg, 43": 9.6 kg	3.9 kg
	Carton Dimensions (W x H x D)		55": 1,330 x 807 x 170 mm, 49": 1,197 x 760 x 166 mm, 43": 1,052 x 650 x 123 mm	631 × 120 × 412 mm
	Packed Weight		55": 21.3 kg, 49": 17.0 kg, 43": 12.2 kg	5.2 kg
	VESA™ Standard Mount Interface		55"/49": 300 × 300 mm 43": 200 × 200 mm	75 × 75 mm
Environment Conditions	Operation Temperature		0°C to 40°C	10°C to 35°C
	Operation Humidity		10% to 80%	10% to 80%
Power	Power Supply		100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type		Built-In Power	Adaptor
	Power Consumption	Typ.	80 W (55") / 65 W (49") / 55 W (43")	25 W
		Smart Energy Saving	55 W (55") / 50 W (49") / 45 W (43")	-
Standard (Certification)	Safety		UL / cUL / CB / TUV / KC	CB
	EMC		FCC Class "A" / CE / KC	FCC Class "A" / CE
	ErP / Energy Star		Yes / Yes (Energy Star 7.0)	Yes / No
Media Player Compatibility	OPS Type Compatible		No	No
	External Media Player Attachable		Yes	No
Software Compatibility*	Content Management Software		SuperSign CMS	-
	Control and Monitoring Software		SuperSign Control	-
Accessories	Basic		Remote Controller (2ea Batteries Included), Power Cord, QSG, RGB Cable, Regulation Book, IR Receiver	Adpater, USB Cable, RGB Cable, Easy Setup Guide, Warranty Card, Product Fiche, Regulatory
	Optional		Speaker (SP-5000), Stand (55"/49": ST-492T, 43": ST-432T), Media Player, Wall Mount Bracket (55"/49": LSW350B, 43": LSW230B), VESA Adapter (55"/49": AM-B330S, 43": AM-B220S), Wi-Fi Dongle (AN-WF500), Touch Overlay	No

1) EU ErP: N/A
* Software compatibility may change over time. Please contact your regional LG sales representative for details.