

## PMI 1000



Powermate PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Powermate stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

### FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- Powermate OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise.




### Desempenho

Frequência	Hz	50
Tensão	V	230
Fase e Conexão		1
Potência Máxima	Watts	1000
Potência Contínua	Watts	900



## Motor

Marco		Powermate
Tipo		OHV
Velocidade Nominal de Operação	rpm	Variable
Combustível		Gasolina
Sistema de Arranque		Recoil
Capacidade de Óleo	l	0.25
Óleo de Guarda		√

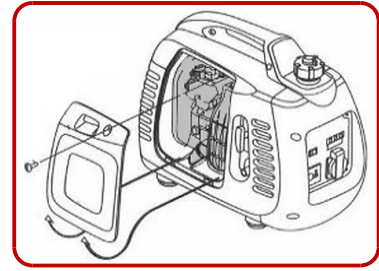

## Alternador

Sistema de Regulagem de Tensão		Inverter
--------------------------------	--	----------

## Dados dimensionais

Comprimento	(L) mm	480
Largura	(W) mm	250
Altura	(H) mm	395
Peso Seco	Kg	14
Dimensão da Caixa CxLxA	mm	510x310x460



## Autonomia

Capacidade do Tanque de Combustível		2.1
Consumo de Combustível @ 75%	l/h	0.42
Tempo de Operação @ 75%	h	5



## Nível de Ruído

Nível de Ruído Garantido (PTN)	dBA	89
Noise pressure level @ 7 mt	dB(A)	61

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### STATUS INDICATORS:

- Outputting energy (indicator light - Green)
- Overloading (indicators light - Red)
- Oil alarming (indicators light - Red)

### PROTECTIONS

- Overload
- Oil Guard

### OUTPUT:

- DC12V 6A
- n°2 USB 5V 2A



## TOMADAS

SCHUKO 230V 16A IP44		1
----------------------	--	---

The information is aligned with the Data file at the time of download. Printed on 09/11/2017 (ID 6424)

©2017 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

**Powermate**  
by PRAMAC