

## PMI 2000



Powermate PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Powermate stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

### FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- Powermate OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise.




### Desempenho

Frequência	Hz	50
Tensão	V	230
Fase e Conexão		1
Potência Máxima	Watts	2000
Potência Contínua	Watts	1600



## Motor

Marco		Powermate
Tipo		OHV
Velocidade Nominal de Operação	rpm	Variable
Combustível		Gasolina
Sistema de Arranque		Recoil
Capacidade de Óleo	l	0.45
Óleo de Guarda		√

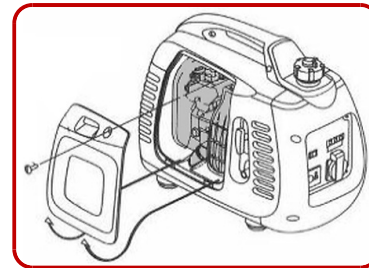

## Alternador

Sistema de Regulagem de Tensão		Inverter
--------------------------------	--	----------

## Dados dimensionais

Comprimento	(L) mm	535
Largura	(W) mm	305
Altura	(H) mm	460
Peso Seco	Kg	22
Dimensão da Caixa CxLxA	mm	555x310x480



## Autonomia

Capacidade do Tanque de Combustível		3.5
Consumo de Combustível @ 75%	l/h	0.75
Tempo de Operação @ 75%	h	4



## Nível de Ruído

Nível de Ruído Garantido (PTN)	dBA	89
Noise pressure level @ 7 mt	dB(A)	61

## TOMADAS

SCHUKO 230V 16A IP44		2
----------------------	--	---



The information is aligned with the Data file at the time of download. Printed on 09/11/2017 (ID 6418)

©2017 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

**Powermate**  
by PRAMAC